

KONINKRIJK DER



NEDERLANDEN

Bureau voor de Industriële Eigendom



REC'D 14 DEC 2004

WIPO

PCT

Hierbij wordt verklaard, dat in Nederland op 24 december 2003 onder nummer 1025125,

ten name van:

BACKBASE B.V.

te Amsterdam

een aanvraag om octrooi werd ingediend voor:

"Method, device and system for extending a mark-up language",


onder inroeping van een recht van voorrang, gebaseerd op de in Nederland op

7 november 2003 onder nummer 1024745 ingediende aanvraag om octrooi, en

dat de hieraan gehechte stukken overeenstemmen met de oorspronkelijk ingediende stukken.

Rijswijk, 3 december 2004

De Directeur van het Bureau voor de Industriële Eigendom,
voor deze,


Mw. C.M.A. Streng

**PRIORITY
DOCUMENT**

SUBMITTED OR TRANSMITTED IN
COMPLIANCE WITH RULE 17.1(a) OR (b)

BEST AVAILABLE COPY

ABSTRACT

The present invention provides a method of rendering document data compliant with an XML-based mark-up language, comprising the steps of:

- fetching the document data;
- 5 - parsing the document data into a document object model (DOM) representation so as to provide a tree structure, comprising nodes representative of the document data elements including tags and/or attributes;
- reconstructing the document object model (DOM)
- 10 representation by replacing the nodes of pre-specified elements of said document data elements by one or more nodes comprising standard XML compliant elements having standard tags and attributes;
- rendering the document data with the reconstructed
- 15 document object model (DOM) representation.

10 25 12 5

1

METHOD, DEVICE AND SYSTEM FOR EXTENDING A MARK-UP LANGUAGE

The present invention relates to a method, device and system for functionally extending a mark-up language for rendering XML compliant document data. The invention also relates to a computer program for implementing the method on a computer.

All modern web browsers support two important technologies, namely plug-ins and scripting for extending functionality of the browser. With plug-in technology, it is possible to extend a browser's standard functionality by downloading and installing separate software. Scripting refers to the possibility to include software (scripting code) in HTML pages that will run inside the browser, within the scope of the currently loaded document. Scripting code may interact with the user and allows access to the contents of the document.

Currently, no standards exist to facilitate support for handling the extended functionality provided by custom tag behaviours in the standard mark-up languages. Some web browser development teams have created various incompatible solutions, often based on proprietary technology. For example, in Internet Explorer, version 5.5 and higher, custom tag and attribute behaviours are supported by means of HTML Component (HTC) files, which define the behaviour of (new) tags and attributes. This technology works only in later versions of Internet Explorer and derived browsers. For example, Mozilla and the recent versions of Mozilla-based browsers, such as Netscape Communicator, support the eXtensible Bindings Language (XBL), which is mainly used for declaring the behaviour of interface components created with XUL, the eXtensible User Interface Language. XUL is mostly used to describe the interface of the

RUL

browser application itself, although it could also be used for web pages. XBL could also be used to extend the standard set of tags that Mozilla-based browsers support. This technology works only in Mozilla-based browsers.

- 5 As mentioned above web browsers support browser plug-in technology, which makes it possible to extend the browser's functionality by downloading and installing separate browser software components, and hence to achieve support for custom tag and attribute behaviours. This technology requires browser-specific plug-ins to be downloaded and installed once before a
10 web page using custom tags/attributes may be visited. This prevents widespread use due to security considerations and the fact that installing plug-ins is often cumbersome.

Also is known to use Java programs (Java applets) that run
15 inside a web browser. However, not all browsers support this technology. Besides, different implementations of the Java runtime environment exist for different web browsers and operating systems. In most cases, loading an applet causes the browser to pause a few seconds in order to start up the Java virtual
20 machine program, which actually runs the Java program. To access the Document Object Model (DOM) tree of an XML document loaded into a web browser's memory, the applet would still have to call JavaScript functions. So while Java may provide a slightly more robust environment to support customised tag and
25 attribute behaviours than JavaScript does, it is inconvenient for this purpose.

Finally methods are known for converting custom tags and/or attributes to standard tags or alter the behaviour of standard tags and attributes that use script code on the web
30 server instead of the client computer. However, these methods require specific server technology, which cannot be deployed

generically in different server environments since in practice server environments are incompatible. Therefore in existing server environments proprietary solutions are applied for custom tag and attribute behaviours.

5 A further drawback of deploying server-side technology is that it consumes valuable resources such as server-side CPU, I/O and most importantly, the bandwidth between server and client.

10 The object of the invention is, for documents based on the XML standard, such as XHTML, without the use of any technology not available by default in the majority of modern web browsers, to facilitate usage of non-standard, or custom tags, to facilitate usage of non-standard, or custom, attributes to existing tags, and/or to control the behaviour of
15 standard tags and attributes.

 According to a first aspect of the present invention a method is provided of rendering document data compliant with an extended XML-based mark-up language, comprising the steps of:

- fetching the document data;
- 20 - parsing the document data into a document object model (DOM) representation so as to provide a tree structure, comprising nodes representative of the document data elements including tags and/or attributes;
- reconstructing the document object model (DOM)
- 25 representation by replacing the nodes of pre-specified elements of said document data elements by one or more nodes comprising standard XML compliant elements having standard tags and attributes;
- rendering the document data with the reconstructed
- 30 document object model (DOM) representation.

 The document data elements can be standard elements,

i.e. elements having standard tags and standard attributes that are pre-defined in some XML compliant standard mark-up language. These standard elements are known to many renderers and therefore can be handled by most of them. The phrase

5 "standard element" used herein also includes proprietary elements, i.e. tags and attributes that are not defined in any of the XML compliant standard mark-up languages, but are supported only by specific renderers (cf. specific web browsers). The present invention enables the rendering of
10 document data containing proprietary elements by a wide variety of renderers, not necessarily being renderers that are designed for handling those specific proprietary tags and/or attributes.

The document data elements can be custom elements as well, i.e. elements having tags or attributes unknown to the
15 existing renderers. Custom elements are not pre-defined in any XML compliant standard mark-up language and therefore cannot be handled properly by any standard renderer.

The document data may also comprise a combination of one or more standard elements and one or more custom elements.

20 In a preferred embodiment the pre-specified elements are elements with standard tags and/or attributes providing a given functionality, the pre-specified elements being replaced by standard XML compliant elements having one or more different tags and/or attributes providing a modified functionality. This
25 enables the standard behavior of standard tags and attributes to be modified, if needed. This might for instance be the case when new functionalities are to be introduced in existing document data.

In another preferred embodiment the pre-specified
30 elements are elements with custom tags and/or custom attributes, the pre-specified elements being replaced by

standard XML compliant elements having standard tags and/or attributes. This enables the possibility of an almost unlimited extension of the functionality offered by any XML based mark-up language.

5 It is to be understood that the reconstructed document object model representation may be rendered directly, without any intermediate steps, such as converting the document object model representation back into an XML compliant file and then rendering the file in a browser.

10 In a further preferred embodiment the method comprises the steps of:

- reconstructing the document object model (DOM) representation by replacing a subset of the pre-specified elements of said document data elements by one or more nodes
- 15 having standard XML compliant elements with standard tags and attributes,
- rendering the document data with the reconstructed document object model (DOM); and
- only upon triggering, for example when a certain
- 20 specific event is detected, reconstructing the document object model (DOM) representation by replacing the remaining pre-specified elements of said document data elements by one or more nodes comprising standard XML compliant elements with standard tags and attributes.

25 In this embodiment the tree structure is alive. This means that the tree structure is directly connected to the rendered result. Any changes in the tree will therefore directly be rendered, for example displayed on a computer screen. Only when needed, i.e. when a user action or an

30 external event from the server requires it, the intermediate elements are replaced by the standard elements that actually

control the behavior. In this way a run-time control of behavior may be accomplished. Run-time as defined here is meant to express the time during which the XML based document is actually displayed on the screen of the client computer or, in
5 other words, the time during which the user may interact with the document.

In a still further embodiment at least one node of a pre-specified element of said document data elements is replaced by one or more nodes with intermediate custom
10 elements. Only upon triggering, i.e. by detecting a certain specific event, for example a user action or an external event from the server, the further step is performed of reconstructing the document object model (DOM) representation by replacing of the at least one node of the at least one
15 intermediate custom element by one or more nodes comprising standard elements having standard tags and attributes.

In a further preferred embodiment the parsing step comprises parsing the document data into a document object model (DOM) representation so as to provide a tree structure,
20 comprising one or more nodes representative of standard XML compliant elements with predefined standard tags and/or attributes and one or more nodes representative of custom elements with one or more custom tags and/or one or more custom attributes; and the reconstructing step comprises
25 reconstructing the document object model (DOM) representation by replacing the nodes of custom elements by one or more nodes comprising standard elements.

This includes the case wherein custom attributes in standard tags are handled. The software developers will in this
30 case be able to make use of the knowledge they already have about the standard XML based mark-up language that is to be

extended by the invention.

According to a second aspect of the present invention a device is provided for rendering document data compliant with an extended XML-based mark-up language, the document data being
5 stored on a remote server and accessible through a network, the device comprising:

- an interface for retrieving the XML compliant document data from the server;
- a parser for parsing the document data into a document
10 object model (DOM) representation so as to provide a tree structure, comprising nodes representative of the document data elements including tags and/or attributes;
- a reconstructor for reconstructing the document object model (DOM) representation by replacing the nodes of pre-
15 specified elements of said document data elements by one or more nodes comprising standard XML compliant elements having standard tags and attributes;
- a renderer for rendering the document data with the reconstructed document object model (DOM) representation.

20 According to a third aspect of the present invention a system is provided for rendering XML compliant document data, comprising a host computer on which the XML compliant document data are stored, a client computer, and a network connecting the host computer and client computer, wherein the client
25 computer comprises:

- a network interface for retrieving the XML compliant document data from the host computer;
- a parser for parsing the retrieved document data into an
object model (DOM) representation so as to provide a tree
30 structure, comprising nodes representative of the document data elements including tags and/or attributes;

- a reconstructor for reconstructing the document object model (DOM) representation by replacing the nodes of pre-specified elements of said document data elements by one or more nodes comprising standard XML compliant elements having standard tags and attributes;

- a renderer for displaying the document data with the reconstructed document object model (DOM) representation.

According to a further aspect of the invention a data carrier is provided, for example an optical disk, hard disk, etc., that contains a recorded computer program product upon whose execution by a processor the method as disclosed herein is carried out.

According to a still further aspect of the invention a computer program is provided for carrying out, when run on a computer, for example a server computer or, preferably, a client computer, the steps of the methods as disclosed herein.

Further advantages, features and details of the present invention will be elucidated on the bases of the following description of some preferred embodiments thereof. Reference is made in the description to the figures, in which:

Figure 1 is a schematic representation of the world-wide-web topography;

Figure 2 is a schematic representation of HTTP client/server communication;

Figure 3a shows an example of HTML code;

Figure 3b is a schematic representation of the DOM tree corresponding to the HTML code of figure 3a;

Figure 3c is a schematic representation of the DOM tree, showing the relations between the nodes of the tree;

Figure 4a shows the conceptual OMT model of the Document Object Model (DOM) representation;

Figure 4b shows the conceptual OMT model of a revised Document Object Model (DOM) representation;

Figure 5 is a flow diagram of the rendering by the client computer of XML compliant document data.

5 Figure 6 is a flow diagram showing the building of the shadow tree;

Figures 7a-7d are schematic representations showing the construction of a shadow tree;

10 Figure 8 is a flow diagram showing the constructing phase of the shadow tree;

Figure 9a shows an example of an original DOM tree;

Figure 9b show the creation of a new element;

Figure 9c shows the addition of extra nodes;

15 Figure 9d shows the insertion of the new element and the removal of the element with the custom tag;

Figure 9e shows the movement of children to new element's append node;

Figure 9f shows a legend pertaining to figures 9a-9e;

20 Figure 10a-10b is a flow chart showing the reconstructing phase of the DOM representation;

Figure 11a shows another example of an original DOM tree, wherein nodes B and E have custom tags;

Figure 11b is a legend pertaining to figure 11a;

25 Figure 11c shows the DOM tree of figure 11a after reconstruction, wherein the original tree structure is saved and the new nodes have been added.

Figure 12a and figure 12c show respectively the DOM tree before and after reconstruction for an example of HTML code of annex 1, while figure 12b shows the legend pertaining
30 to figures 12a and 12c;

Figures 13a-13d show screenshots of an example of code running on a first browser (Internet Explorer) and a second browser (Mozilla);

Figure 14a is a schematic representation of an
5 incompletely reconstructed DOM tree;

Figure 14b is a schematic representation showing the creation of a new element;

Figure 14c is a schematic representation showing the addition of extra nodes;

10 Figure 14d is a schematic representation of a further reconstructed DOM tree;

Figure 14e is the legend pertaining to figures 14a-14d;

Figure 15a is a schematic representation of the process of dynamically adding new nodes to an existing node in the DOM
15 tree;

Figure 15b is a schematic representation of the process dynamically updating existing nodes of a DOM tree; and

Figure 15c is the legend pertaining to figures 15a and
15b.

20 The invention provides a functional extension of an XML-based mark-up language with custom tag and attribute behaviours, implemented solely with standardised and thus commonly available features and technology. The invention facilitates the use of new tags within a predefined mark-up
25 language, adds new attributes to existing tags, and controls the behaviour of standard tags and attributes in documents based on the XML standard, such as XHTML, without the use of any technology not available by default in the majority of modern web browsers.

30 The invention pertains to the process of the initial parsing and rendering of XML documents as well as the following

process of the human-computer interaction with the user interface that may be described by such documents. Said processes may take place in any rendering computer program that supports 'dynamic HTML', for example modern web browsers such as Microsoft Internet Explorer, Netscape Communicator, Opera, Mozilla, including any browser applications based on the technology of these standard browsers, or so-called 'derived browsers'.

As mentioned earlier the invention is a method, system and computer program that provides functional extension of the standard tags and attributes of an XML-based mark-up language with new, custom, behaviours for tags and attributes, its implementation depending solely on standardised and thus commonly available features and technology. This technology can be any XML rendering software or apparatus ("renderer") that supports the Document Object Model (DOM) together with a scripting environment through which DOM data structures may be accessed and modified (such as JavaScript). Examples of computer programs incorporating such XML rendering software include Internet Explorer 5 and up, and Mozilla 1.1 and up.

The invention is not restricted to any existing rendering technology, but pertains to any future rendering software (based on currently existing technology or not) that supports the techniques used by the invention for handling custom tag and/or attribute behaviours.

For a user of the invention, for instance a website programmer or an application developer, the invention appears as what could be called a "horizontal extension" of HTML, in that it both augments the functionality of existing tags as well as provides for new tags that realise new functionality within the domain of HTML and/or XML-based mark-up languages.

The invention requires no server technology to function, yet makes it possible to mix standard tags with new tags and optionally enhance the functionality of the attributes of existing tags.

5 Conventional HTML is oriented towards rendering documents. With DHTML, the combination of HTML, Cascading Style Sheets (CSS) and Javascript, interactive documents can be used to form graphical user interfaces. This approach requires creating large portions of Javascript code to control the
10 interface's required interactivity. In practice, many approaches to creating DHTML user interface controls are characterised by relatively long development time, poor usability and reusability due to various reasons. The invention makes it possible to formalise DHTML by extending XHTML with
15 tags and attributes that implement user interface controls. This way, user interfaces and their corresponding interaction model may be elegantly declared in a high-level mark-up language, instead of labour-intensive programming in languages such as Javascript.

20 To said high-level user interface declaration, use of the invention requires no modification in existing infrastructure, either client-side or server-side. In fact, it solely depends on common functionality available in modern web browsers.

25 The Worldwide Web (WWW) refers to the collection of publicly accessible web servers on the Internet (figure 1). Individuals browsing the web contact these web servers through software called a browser (client), which facilitates communication between a personal computer (for instance) and a
30 web server. This communication uses the HyperText Transfer Protocol, or HTTP. The actual data sent from server to client

may be any media format, but the most common format is HTML, an SGML-based mark-up language (fig. 2).

A simplified view of the workings of a web client is shown in figure 2. Incoming documents are processed by the
 5 renderer, the central part of a web browser program. The renderer converts the document to a tree-shaped data structure that conforms to the Document Object Model standard (DOM) as specified by the World Wide Web Consortium (3WC). The contents
 10 of this data structure, or DOM tree, determine what is shown on, for instance, the computer screen or the printer. In modern browsers, all changes in the DOM tree are reflected to the screen output immediately.

Besides HTML, there exists a more recently introduced mark-up language called XML, which is more structured and -
 15 contrary to HTML - defines no presentation rules when used on its own. A further development is a mark-up language known as XHTML, which is an XML-based version of HTML and resembles HTML to a great extent, yet conforms to the stricter XML standard. HTML, XML and XHTML use tags and attributes as the main means
 20 to describe data. When, for instance, `` is included in an XHTML document, this will cause an image to be included in the document. In this case, the tag is "img" and the attribute is "src".

A DOM tree consists of nodes that have other nodes as
 25 their children. Nodes come in different types, the two most important ones being element and the text. Nodes of type element correspond to tags, type text nodes usually to the data between tags. Figures 3a and 3b show part of an example HTML file together with its corresponding DOM tree (figure 3b), with
 30 two nodes of type text: "some text" and "bold text". Figure 3c shows the underlying relationships in a DOM tree with more

detail, with arrows for the node references to first child, last child, previous sibling, next sibling and parent.

Figure 4a is an OMT model depicting one of the preferred embodiments of the invention. This model does not necessarily represent any actual implementation of the invention; it merely illustrates the nature and results of the invention according to the object-oriented paradigm. In this logical model, the invention may be identified as the BACKBASE Element class. As can be seen in figure 4a, one may think of all standard HTML tags, such as and <div>, to be derived from class DOM Element. In figure 4b, these tags now logically 'inherit' functionality from BACKBASE Element. So for instance, if an application of the invention implements drag-and-drop functionality by defining and implementing the behaviour of the tags 'draggable' and 'dropreceiver', DOM Elements corresponding to standard tags could, if attribute draggable was set to "yes", be dragged and dropped into, say, a <div> element with attribute dropreceive set to true.

According to a preferred embodiment the method for the display of XHTML data is as follows:

1. The renderer fetches the XML data ("document"), for instance an XHTML file, from a file system or web server (figure 5) using standard means such as HTTP.
- 25 2. The renderer parses this document and creates a corresponding DOM tree ~~that reflects~~ the structure of the document.
3. During or after step (2), the renderer creates a representation of the DOM tree on its current output device, in most cases a computer screen. Unknown tags and/or
- 30

attributes are ignored. However, they are represented in the document's DOM tree. Normally, the process stops at this point.

5 The DOM tree is preferably, but not necessarily, modified in a two-phase process (see also figure 6):

Phase 1: Build shadow tree phase. A secondary tree structure, the "shadow tree", is created, in which the current (original) DOM structure is saved.

10 Phase 2: DOM tree reconstruction phase. The DOM tree is modified on a node-by-node basis by a) replacing certain elements with new nodes, and b) modifying certain properties of certain elements.

15 Although creating the shadow tree is not an absolute requirement for the invention to work, saving the composition of the DOM tree before modifying allows easy access to the original structure later. The shadow tree is created by saving the following properties (table 1) of every element in alternative data members:

20

Table 1 List of DOM element properties and corresponding shadow tree properties

DOM Element property	Shadow Tree property
firstchild	oFirst
lastChild	oLast
nextSibling	oNext
previousSibling	oPrev
parentNode	oParent

25 In this embodiment the shadow tree is created by traversing the document's DOM tree node for node. Figures 7a-7c show how the original DOM tree relationships are saved in the

30

shadow tree, and what the effect after reconstruction is. Figure 8 describes the algorithm using a flow diagram:

1. The algorithm starts at the root node of a DOM tree, often the body of the document.

5 2. The five attributes listed in the table above are initialised with null values.

3. If the node has no child nodes, the process ends.

4. When a child node is added to its parent in the shadow tree, the parent's oFirst and oLast properties are
10 updated as needed. Also, the oPrev, oNext and oParent properties of the child node and its siblings the shadow tree are updated as necessary.

5. For every child, a recursive call is made so that the algorithm may backtrack after having reached the leaves of
15 a part of the DOM tree. (This step was introduced to make the flowchart clearer, but does not represent a favourable programming approach.)

6. If the type of the child node is not element, go to step 5 (text nodes, comment nodes etc. are skipped and do not
20 form part the shadow tree).

7. The process continues at step 2 for the current child node.

The above method is further elucidated in figures 7a-
25 7c. Figure 7a shows the original DOM tree. Node A has node B as only child. Figure 7b shows the situation after step 1, just before reconstruction. The original tree relationships have been saved in the shadow tree. Figure 7c shows the situation after step 2. Node B' has replaced node B, while the original
30 tree structure is still preserved.

In the reconstruction phase of the DOM tree, the method traverses the DOM tree node for node. Starting for example from the DOM tree shown in figure 9a, when an element with a custom tag ("custom element") is encountered, a new node
 5 is created (for example, a <div> element in figure 9b).

Optionally, additional nodes (depending on the custom tag's implementation requirements) are added to this new node (two <div> elements in figure 9c; the one labelled "append" will serve to contain the custom element's children). The new node
 10 is inserted in the parent's children list immediately before the custom element (figure 9d). Afterwards, the element with the custom tag is removed from the DOM tree (figure 9d). Figure 9e shows how the children of the custom element are moved to the new node (or to part of the subtree the new node is root of
 15 - the element labelled "append" in figure 9e). Finally, the new node and the custom element are mutually connected by giving each of them a property containing a reference to the other (cf. dotted line in figure 9e). This way, the original node and all its attributes or other data node remain accessible.

20 Figures 10a and 10b provide a detailed description of the method for custom tag and custom attribute support. In this embodiment the method comprises the steps of:

1. The algorithm starts at the original root element (NODE) of a DOM tree, often the body of the document.

25 If the tag of NODE is not supported by the invention, jump to step 20.

2. A new node, called NEWNODE, mostly of type element, is created.

If no attributes (standard and/or custom) supplied for the node
 30 might affect NEWNODE and therefore need no processing, proceed

to step 6.

3.Process NODE's attributes.

4.If no extra nodes (like the two elements in figure 9c) are needed, jump to step 9.

5 The extra nodes (which can themselves have child nodes) are created and added to NEWNODE.

5.One of the extra nodes, called APPENDNODE, is assigned to be the container of the original node's child nodes. (In some practical cases, this role may be assigned to various child nodes). Continue at step 10.APPENDNODE is set to be the newly created node.

6.If the original node has no parent node, proceed to step 13.

7.NEWNODE is added to the original node's parent by inserting it immediately before (or after) NODE.

8.The original node is removed (disconnected) from its parent.

9.If NODE has no child nodes, continue at step 16.

10.Move the first (remaining) child node from the original node to APPENDNODE. Jump back to step 13.

11.Mutually connect NEWNODE and NODE to each other (i.e. both get an attribute that references the other).

12.If APPENDNODE has no child nodes (the original node would have had none either), the process exits. Otherwise,

25 "children" now denotes the APPENDNODE's child nodes.

13.For every child in "children", a recursive call is made so that the algorithm may backtrack after having reached the leaves of a part of the DOM tree. (This step was introduced to make the flowchart clearer, but does not represent a favourable programming approach.)

14.If the type of the child node is not element, go to step 17 (text nodes, comment nodes etc. are skipped as they have no possible custom tag themselves nor have any children that might do so).

5 15.The process continues at step 2 for the current child node (NODE now refers to that child node).

16.If no attributes (standard and/or custom) supplied for NODE need processing, proceed to step 22.

17.Process NODE's attributes.

10 If NODE has no child nodes, the process exits. Otherwise, "children" now denotes the NODE's child nodes; proceed at step 17.

The above method steps are further elucidated in figures 11a and 11c. For clarity, figure 11b shows a detailed view (including all relationships) of the combined result of step 1 and step 2 on the DOM tree shown in figure 11a.

Table 2 shows example XHTML source code that depends on the invention (referred to as 'backbase_mini.js') to implement the required functionality for the tree tag and the tooltip attribute. Figure 12a depicts the DOM tree for this example XHTML code, while figure 12b explains the meaning of the different parts shown in figure 12a and 12c. In figure 12c the structure of the DOM tree after reconstruction is shown.

Table 2 Example of XHTML source code

```

<html xmlns:b="http://www.backbase.com">

  <head>

    <script type="text/javascript"
30 src="backbase_mini.js"></script>

```

```

    </head>

    <body onLoad="MASTER_CONTROL_PROGRAM_INIT();"

        <b:tree>

            1. tree root

5            <b:tree tooltip="item 1">item
1.1</b:tree>

            <b:tree tooltip="item 2">item
1.2</b:tree>

        </b:tree>

10    </body>

    </html>

```

Appendix 1 is a working minimal implementation of the invention that supports the tree tag and the tooltip attribute. The shadow tree phase is not implemented in this code. Figures 15 13a-13d show screenshots of Microsoft Internet Explorer and Mozilla running the code in table 2 and appendix 1. Figure 13a shows a screenshot of an example of code running in the Internet Explorer browser. Figure 13b shows a screenshot of the example of figure 13a, after clicking the "tree root" and 20 hovering over "item 1.2". Figures 13c and 13d show corresponding screenshots if another web browser (Mozilla) is used.

Another preferred embodiment of the present invention is explained in figures 14a-14d. In this embodiment only one of 25 both custom elements (with a custom tag and/or a custom

attribute) is replaced in the reconstructing phase.

Reconstruction of the remaining custom element(s) into their corresponding final standard elements may be delayed until for instance user input or an external event requires it. If we

5 consider the example of figure 9d, we see that the first custom element <cust1> has been reconstructed. However, the second custom element <cust2> has not yet been reconstructed. For example, at start-up of the browser reconstructs the DOM tree by replacing the first custom element only. Only in a later
10 stage when the reconstructed first custom element is activated, the DOM tree is restructured again by replacing the second custom element <cust2> by one or more standard elements, as is shown in figures 14b-14e.

In a further preferred embodiment one or more new
15 elements are added dynamically, i.e. at run time of the program, to an existing element. This is shown in figure 15 wherein new element <new> is added to the existing first element <orig1>. The new elements may be loaded by the renderer at any stage, i.e. at start-up and at-run time. The new
20 elements may be standard elements or custom elements. In another preferred embodiment one or more existing elements can be replaced by one or more new (standard and/or custom) elements. This is for example shown in figure 15b, wherein the existing third element <orig1> of the tree is replaced by a new
25 node <new> that may provide a different behavior.

The present invention is not limited to the above-described preferred embodiments thereof; the rights sought are defined by the following claims, within the scope of which many modifications can be envisaged.

APPENDIX 1

```

function oBrowser() {
    var sUA = navigator.userAgent.toLowerCase();
5   this.ie = ((sUA.indexOf('msie') != -1) && (sUA.indexOf('opera')
    == -1)) ? true : false;
    return this;
}
var oBrowser, oBody, oToolTipNode = null;
10 function MASTER_CONTROL_PROGRAM_INIT() {
    oBrowser = new oBrowser();
    oBody = (oBrowser.ie && document.documentElement &&
document.body.clientHeight <= 20) ?
        document.documentElement : oBody = document.body;
15   DOM_Reconstruct(oBody, false);
}
function DOM_GetAtt(sAtt, oNode) { return oBrowser.ie ? oNode[sAtt] :
oNode.getAttribute(sAtt); }

20 function DOM_NormalizeTag(oNode) {
    if (oBrowser.ie) var sTag = oNode.tagName;
    else {
        var sTag = oNode.nodeName.split(':')[1];
        if (!sTag) sTag = oNode.nodeName;
25   }
    if (sTag) oNode.sTag = sTag.toUpperCase();
}
function DOM_Reconstruct(oNode) {
    DOM_NormalizeTag(oNode);
30   if (oNode.sTag == 'TREE') PARSE_TREE(oNode);
    else {
        oNode.oElm = oNode;
        oNode.oElm.oNode = oNode;
        DOM_ReconstructKids(oNode);
35   }
    if (DOM_GetAtt('tooltip', oNode)) EVENT_Add(oNode.oElm ?
oNode.oElm : oNode);
}
function DOM_ReconstructKids(oNode) {
40   for (var i = 0; i < oNode.childNodes.length; i++) {
        var oKid = oNode.childNodes[i];
        if (oKid.nodeType == 1) DOM_Reconstruct(oKid);
    }
}
45 function BUILD_CreateReplaceElm(sTag, oNode) {
    var oElm = document.createElement(sTag);
    if (oNode.parentNode) {
        oNode.parentNode.insertBefore(oElm, oNode);

```



```

        oNode.parentNode.removeChild(oNode);
    }
    while (oNode.childNodes.length)
oElm.appendChild(oNode.childNodes[0]);
5     oElm.oNode = oNode;
    oNode.oElm = oElm;
    oElm.sTag = oNode.sTag;
    return oElm;
}
10 function PARSE_TREE(oNode) {
    var oElm = BUILD_CreateReplaceElm('DIV', oNode);
    oNode.oLabel = document.createElement('SPAN');
    oNode.oNestedTrees = document.createElement('DIV');
    oNode.oNestedTrees.style.paddingLeft = '10px';
15     oNode.oNestedTrees.style.display = 'none';
    while (oElm.childNodes.length) {
        var oChildNode = oElm.childNodes[0];
        DOM_NormalizeTag(oChildNode);
        if (oChildNode.sTag == 'TREE')
20     oNode.oNestedTrees.appendChild(oChildNode)
            else oNode.oLabel.appendChild(oChildNode);
    }
    oElm.appendChild(oNode.oLabel);
    oElm.appendChild(oNode.oNestedTrees);
25     if (oNode.oNestedTrees.childNodes.length) {
        oNode.oLabel.oNode = oNode;
        oNode.oLabel.onclick = TREE_CLICK;
    }
    DOM_ReconstructKids(oNode.oLabel);
30 }
function TREE_CLICK(eEvent) {
    var oNode = this.oNode;
    if (!oNode.oNestedTrees.bRendered) {
        for (var i = 0; i <
35     oNode.oNestedTrees.childNodes.length; i++)
            DOM_Reconstruct(oNode.oNestedTrees.childNodes[i]);
        oNode.oNestedTrees.bRendered = true;
    }
40     if (oNode.oNestedTrees.childNodes.length) {
        oNode.oNestedTrees.style.display = oNode.bOpen ?
        'none' : '';
        oNode.bOpen = !oNode.bOpen;
    }
45 }
function EVENT_Add(oElm) {
    if (oBrowser.ie) {
        oElm.onmouseover = EVENT_Over;
    }
}

```

```

        oElm.onmouseout = EVENT_Out;
    } else {
        oElm.addEventListener('mouseover', EVENT_Over, false);
        oElm.addEventListener('mouseout', EVENT_Out, false);
5    }
}
function EVENT_FindNode(oElm)
{
    var oNode = oElm.oNode;
10    if (!oNode) {
        while (oElm.parentNode) {
            oElm = oElm.parentNode;
            if (oElm.oNode) break;
        }
15        oNode = oElm.oNode;
    }
    return oNode;
}
function EVENT_Over(eEvent) {
20    var oElm = oBrowser.ie ? window.event.srcElement : this;
    oNode = EVENT_FindNode(oElm);
    if (DOM_GetAtt('tooltip', oNode)) {
        if (!oToolTipNode) {
            oToolTipNode =
25    document.createElement('DIV');
            oToolTipNode.style.position = 'absolute';
            oToolTipNode.style.backgroundColor =
                '#EEEEEE';
            oBody.appendChild(oToolTipNode);
30        }
        oToolTipNode.innerHTML = DOM_GetAtt('tooltip', oNode);
        oToolTipNode.style.left = _iMouseX + 'px';
        oToolTipNode.style.top = _iMouseY + 'px';
        oToolTipNode.style.display = '';
35    }
    if (!eEvent) eEvent = window.event;
    if (eEvent.stopPropagation) eEvent.stopPropagation();
    else eEvent.cancelBubble = true;
    return false;
40 }
function EVENT_Out(eEvent) {
    var oElm = oBrowser.ie ? window.event.srcElement : this;
    oNode = EVENT_FindNode(oElm);
    if (DOM_GetAtt('tooltip', oNode)) oToolTipNode.style.display =
45    'none';
    if (!eEvent) eEvent = window.event;
    if (eEvent.stopPropagation) eEvent.stopPropagation();
    else eEvent.cancelBubble = true;

```

```
        return false;
    }
    var _iMouseX, _iMouseY;
    function EVENT_MouseMove(eEvent) {
5        _iMouseX = (oBrowser.ie) ? event.x - 2 : eEvent.pageX;
        _iMouseY = (oBrowser.ie) ? event.y - 2 : eEvent.pageY;
    }
    document.onmousemove = EVENT_MouseMove;
```

CLAIMS

1. Method of rendering document data compliant with an XML-based mark-up language, comprising the steps of:

- fetching the document data;
- parsing the document data into a document object model (DOM) representation so as to provide a tree structure, comprising nodes representative of the document data elements including tags and/or attributes;
- reconstructing the document object model (DOM) representation by replacing the nodes of pre-specified elements of said document data elements by one or more nodes comprising standard XML compliant elements having standard tags and attributes;
- rendering the document data with the reconstructed document object model (DOM) representation.

2. Method according to claim 1, wherein the pre-specified elements are elements with standard tags and/or attributes providing a functionality, the pre-specified elements being replaced by standard XML compliant elements having one or more different tags and/or attributes providing a modified functionality.

3. Method according to claim 1 or 2, wherein the pre-specified elements are elements with custom tags and/or custom attributes, the pre-specified elements being replaced by standard XML compliant elements having standard tags and/or attributes.

4. Method according to any of the preceding claims, comprising the steps of:

- reconstructing the document object model (DOM)

representation by replacing a subset of the pre-specified elements of said document data elements by one or more nodes having standard XML compliant elements with standard tags and attributes;

5 - rendering the document data with the reconstructed document object model (DOM); and

 - only upon triggering reconstructing the document object model (DOM) representation by replacing the remaining pre-specified elements of said document data elements by one
10 or more nodes comprising standard XML compliant elements with standard tags and attributes.

5. Method according to claim 4, wherein triggering is caused during run-time by user action or an external event, for example originating from the server.

15 6. Method according to any of the preceding claims, wherein:

 - the parsing step comprises parsing the document data into a document object model (DOM) representation so as to provide a tree structure, comprising one or more nodes
20 representative of standard XML compliant elements with standard tags and/or attributes and one or more nodes representative of custom elements with one or more custom tags and/or one or more custom attributes; and

 - the reconstructing step comprises reconstructing the
25 document object model (DOM) representation by replacing the nodes of custom elements by one or more nodes comprising standard elements.

7. Method according to any of the preceding claims, wherein the step of reconstructing the document object model
30 (DOM) representation comprises accessing and modifying the

DOM representation data by executing program code, preferably script code.

8. Method according to claim 7, wherein a JavaScript interpreter is applied to execute the script code.

5 9. Method according to any of the preceding claims, wherein the step of reconstructing the DOM representation comprises the steps of:

a) traversing the DOM representation node for node recursively;

10 b) upon detecting a node that is to be replaced:

b1) creating a new node of standard elements;

b2) optionally creating a subtree of one or more additional nodes by adding these additional nodes to the newly created node;

15 b3) inserting the new node and the additional nodes, if any, into the parents children list of the document object model (DOM) representation on a position immediately before or after the node representative of the node that is to be replaced;

20 b4) removing the node that is to be replaced from the document object model (DOM) representation;

b5) moving one or more children of the removed node that was to be replaced to the new node or to a preset additional node, if any, that is part of the subtree the new
25 node is root of.

10. Method according to claim 9, comprising the step of mutually connecting the new node and said node that was to be replaced .

11. Method according to claim 10, wherein the step
30 of connecting comprises providing both the node of the node

that was to be replaced and the new node with an attribute containing a reference to one another.

12. Method according to any of the preceding claims, comprising after the step of parsing the document data into
5 a document object model (DOM) representation the additional step of saving the current document object model (DOM) representation in a document object model (DOM) shadow representation.

13. Method according to claim 12, comprising
10 preserving the DOM element attributes first child, last child, next sibling, previous sibling, and parent node for all DOM elements described in the current document data.

14. Method according to claim 12 or 13, comprising traversing the DOM representation node for node and saving
15 the DOM representation into the DOM shadow representation, by

- a) starting with some root node;
 - b) initializing at least the attributes representative of the first child node, the last child node, the next
20 sibling node, the previous sibling node, and the parent node with predefined start values, preferably null values;
 - c) detecting if the node has a child node;
 - d) if the node has a child node, then add that child node to the node in the DOM shadow representation by
25 updating the values of attributes firstChild and lastChild of the node and updating the values of attributes previousSibling, nextSibling and parentNode of the child node and, where necessary, its new siblings;
 - e) repeating steps b-d for every further child node.
- 30 15. Method according to any of the preceding claims,

wherein the step of fetching the document data comprises fetching the data from a remote server.

16. Method according to any of the preceding claims, wherein the step of rendering the document data with the reconstructed document object model (DOM) representation is performed by a standard browser.

17. Method according to any of the preceding claims, comprising:

- reconstructing the document object model (DOM) representation by replacing at least one node of a pre-specified element of said document data elements by one or more nodes with intermediate custom elements,
- rendering the document data with the reconstructed document object model (DOM) using the at least one intermediate custom element; and
- upon triggering the step of reconstructing the document object model (DOM) representation by replacing of the at least one node of the at least one intermediate custom element by one or more nodes comprising standard elements having standard tags and attributes.

18. Method according to any of the preceding claims, wherein the XML compliant document data is an XHTML document.

19. Method according to any of the preceding claims, comprising the step of dynamically adding one or more new elements to an existing element.

20. Method according to any of the preceding claims, comprising the step of dynamically replacing one or more existing elements by one or more new elements.

21. Device of rendering document data compliant with

an extended XML-based mark-up language, the document data being stored on a remote server and accessible through a network, the device comprising:

5 - an interface for retrieving the XML compliant document data from the server;

 - a parser for parsing the document data into a document object model (DOM) representation so as to provide a tree structure, comprising nodes representative of the document data elements including tags and/or attributes;

10 - a reconstructor for reconstructing the document object model (DOM) representation by replacing the nodes of pre-specified elements of said document data elements by one or more nodes comprising standard XML compliant elements having standard tags and attributes;

15 - a renderer for rendering the document data with the reconstructed document object model (DOM) representation.

22. Device according to claim 21, wherein the pre-specified elements are elements with standard tags and/or attributes providing a functionality and the reconstructor is adapted so as to replace the pre-specified elements by standard XML compliant elements having one or more different tags and/or attributes providing a modified functionality.

23. Device according to claim 21 or 22, wherein the pre-specified elements are elements with custom tags and/or custom attributes and the reconstructor is adapted so as to replace the pre-specified elements by standard XML compliant elements having standard tags and/or attributes.

24. Device according to claim 21, 22 or 23, wherein the reconstructor is adapted so as to perform the method steps of one of the claims 4-20.

25. A system for rendering XML compliant document data, comprising a host computer on which the XML compliant document data are stored, a client computer, and a network connecting the host computer and client computer, wherein
5 the client computer comprises:

- a network interface for retrieving the XML compliant document data from the host computer;

- a parser for parsing the retrieved document data into an object model (DOM) representation so as to provide a tree
10 structure, comprising nodes representative of the document data elements including tags and/or attributes;

- a reconstructor for reconstructing the document object model (DOM) representation by replacing the nodes of pre-specified elements of said document data elements by one or
15 more nodes comprising standard XML compliant elements having standard tags and attributes;



- a renderer for displaying the document data with the reconstructed document object model (DOM) representation.

26. System according to claim 25, wherein the
20 reconstructor and/or renderer are adapted so as to perform the method steps according to one of the claims 1-20.

27. Device comprising a computer program product and at least one processor, the computer program product comprising instructions for causing the processor to execute
25 the method steps of any one of claims 1-20.

28. Data carrier containing a recorded computer program product upon whose execution by a processor the method according to any of claims 1-20 is carried out.

29. Computer program for carrying out, when run on a
30 computer, the steps of any of the method claims 1-20.

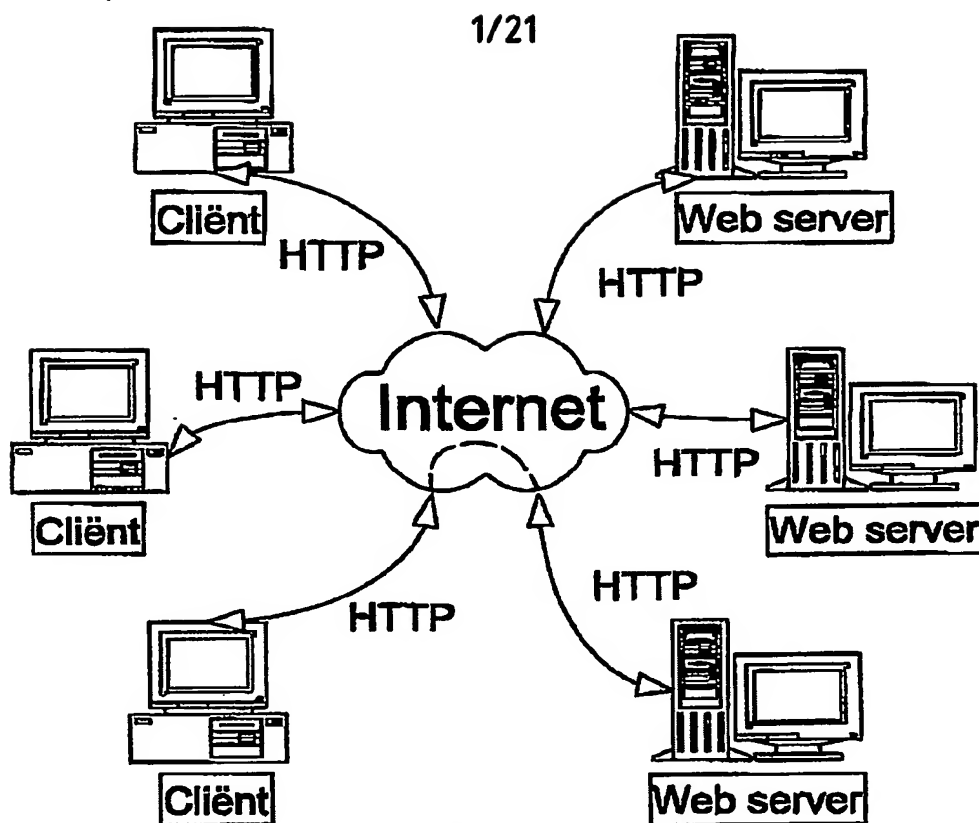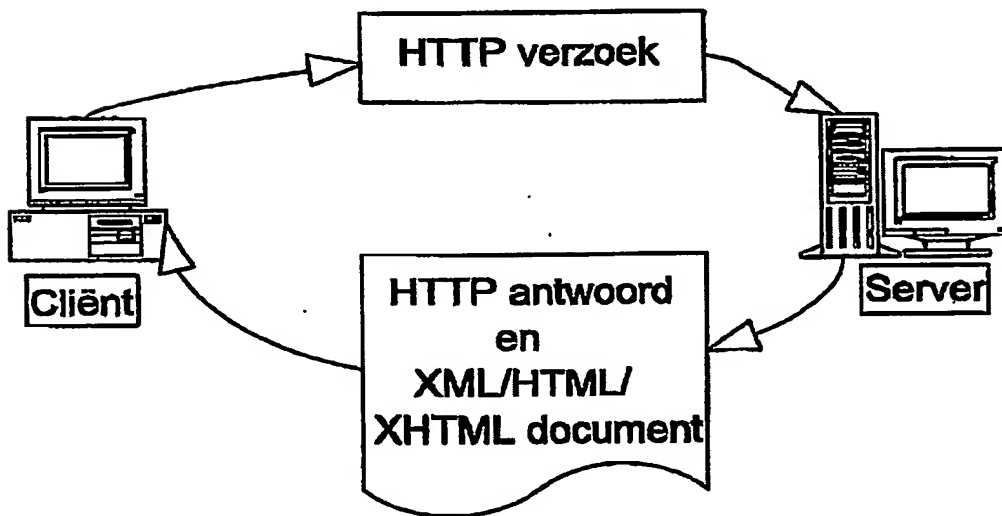10 25 12 5**FIG. 1****FIG. 2**

DL

102512

2/21

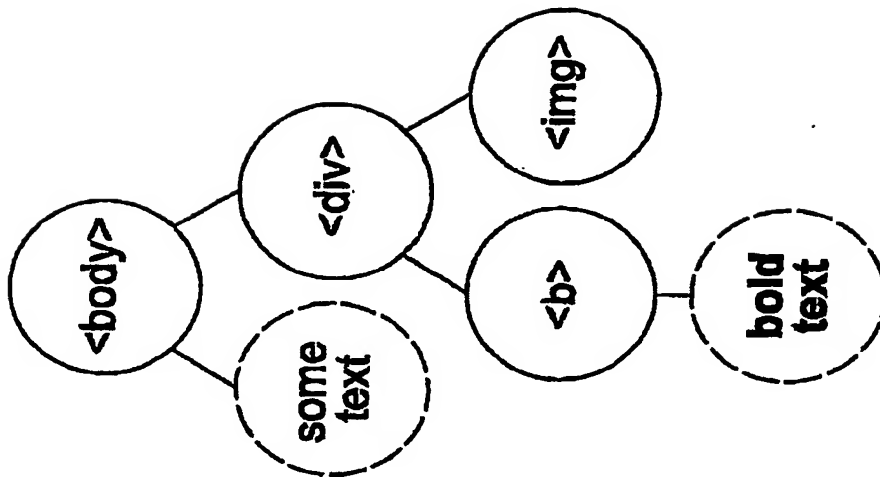


FIG. 3B

```

<body>
  some text
  <div>
    <b>
      bold text
    </b>
    
  </div>
</body>
  
```

FIG. 3A

1025125

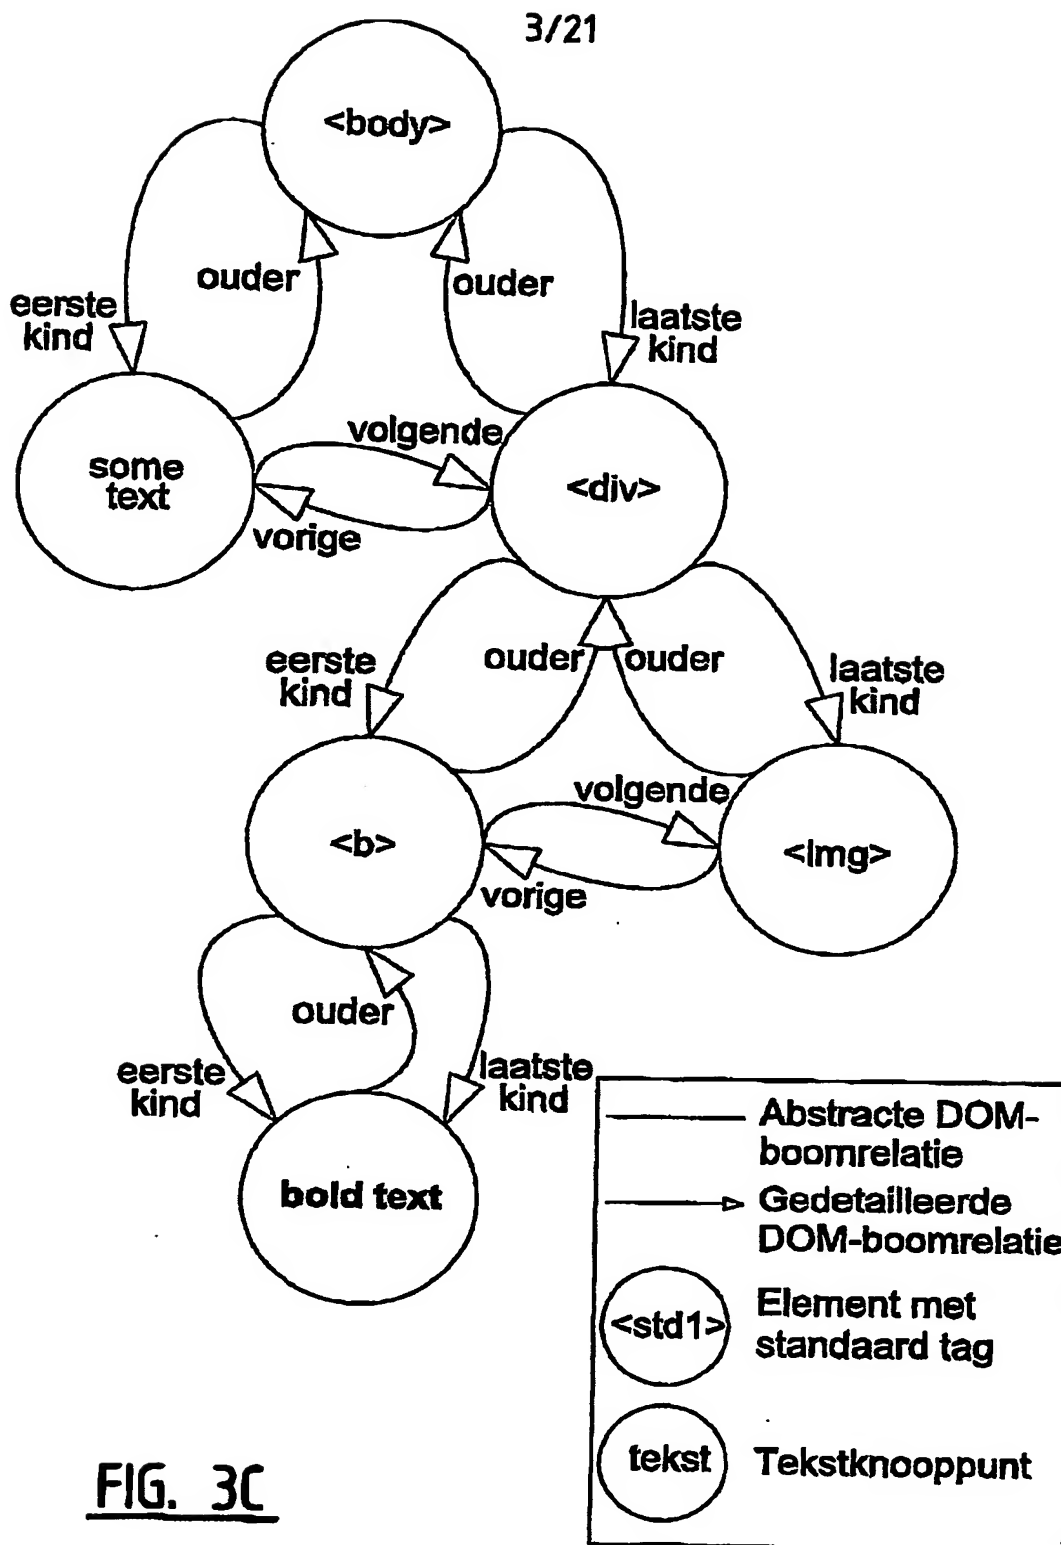


FIG. 3C

10 25 12 5

4/21

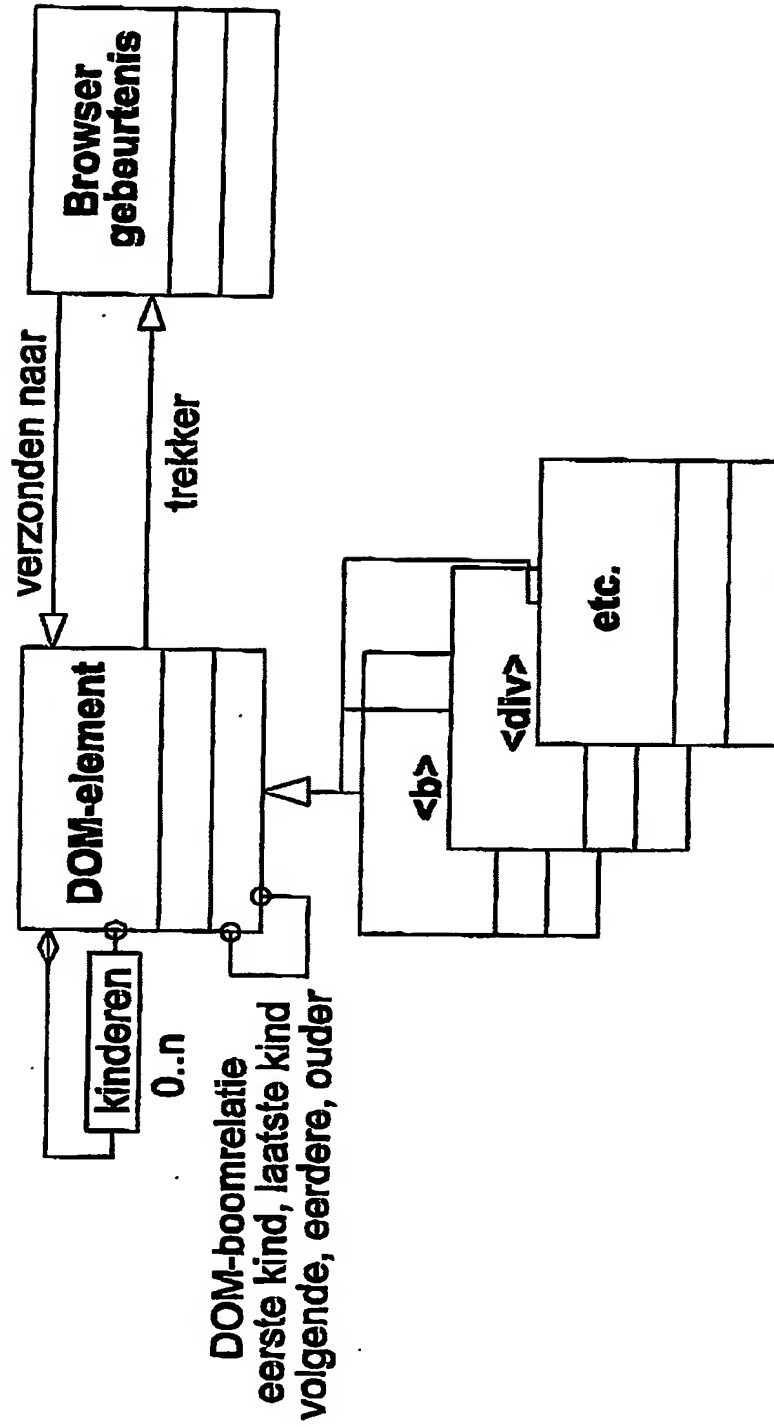


FIG. 4A

10 25 12 5

5/21

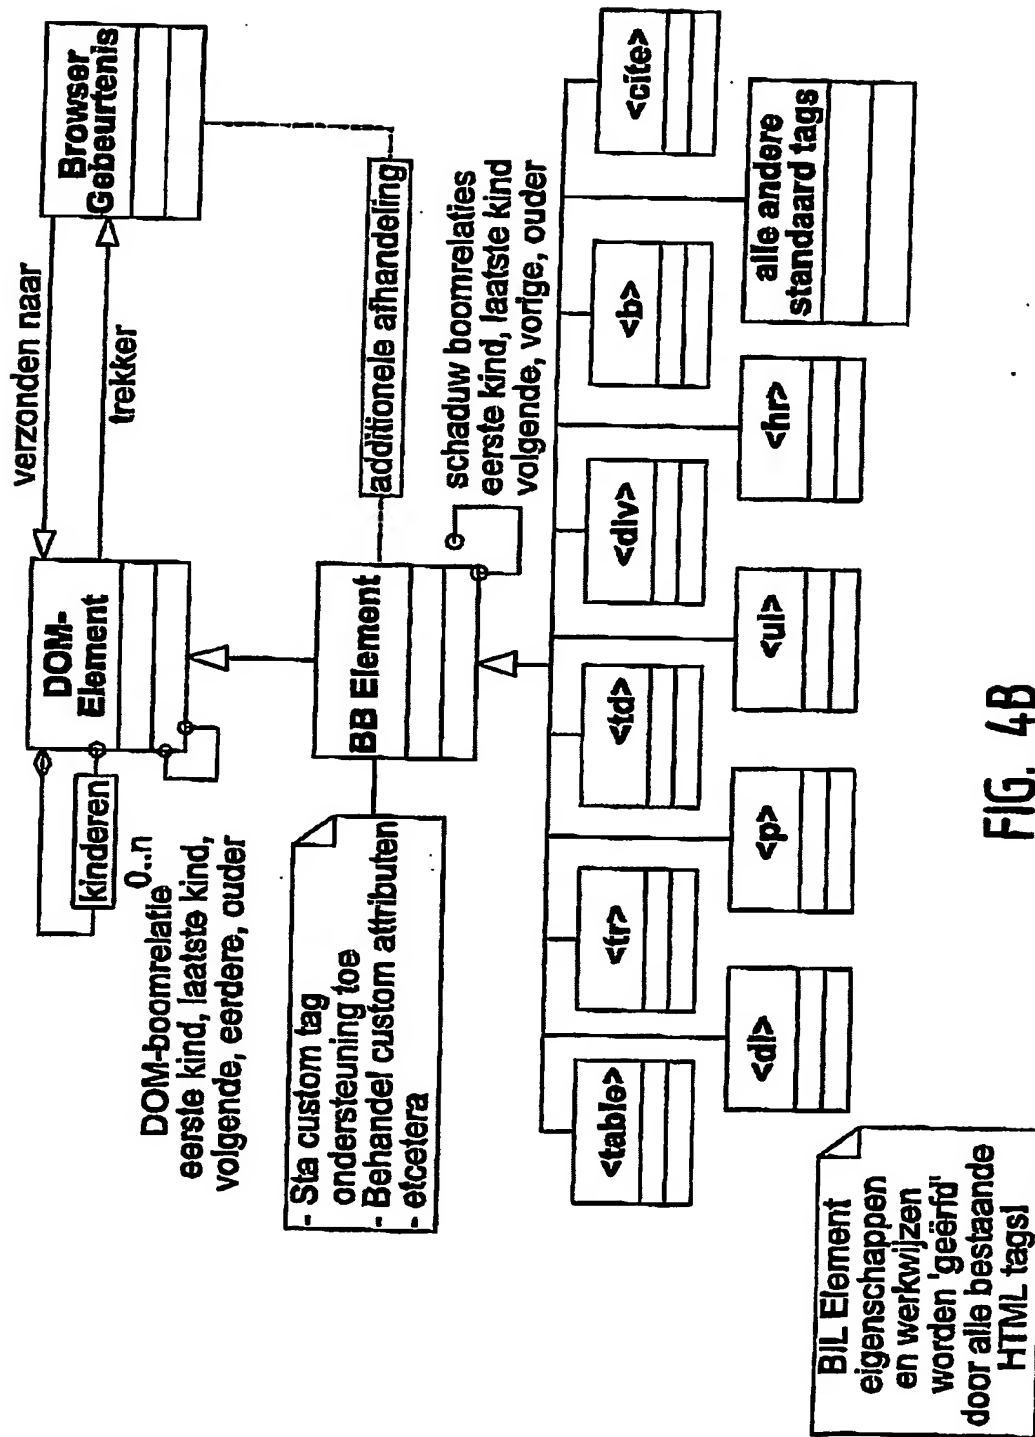


FIG. 4B

10 25 12 5

6/21

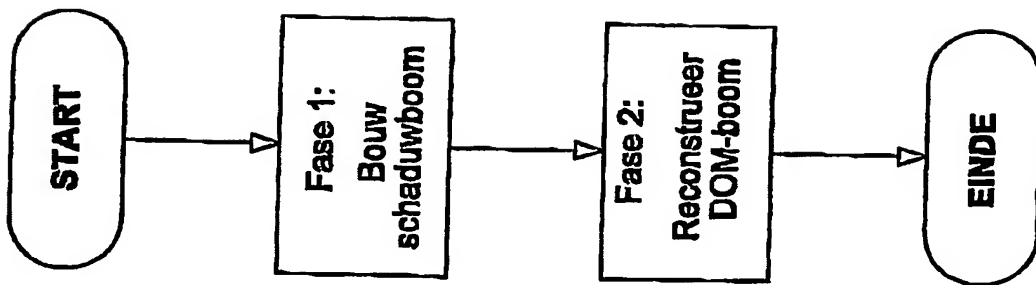


FIG. 6





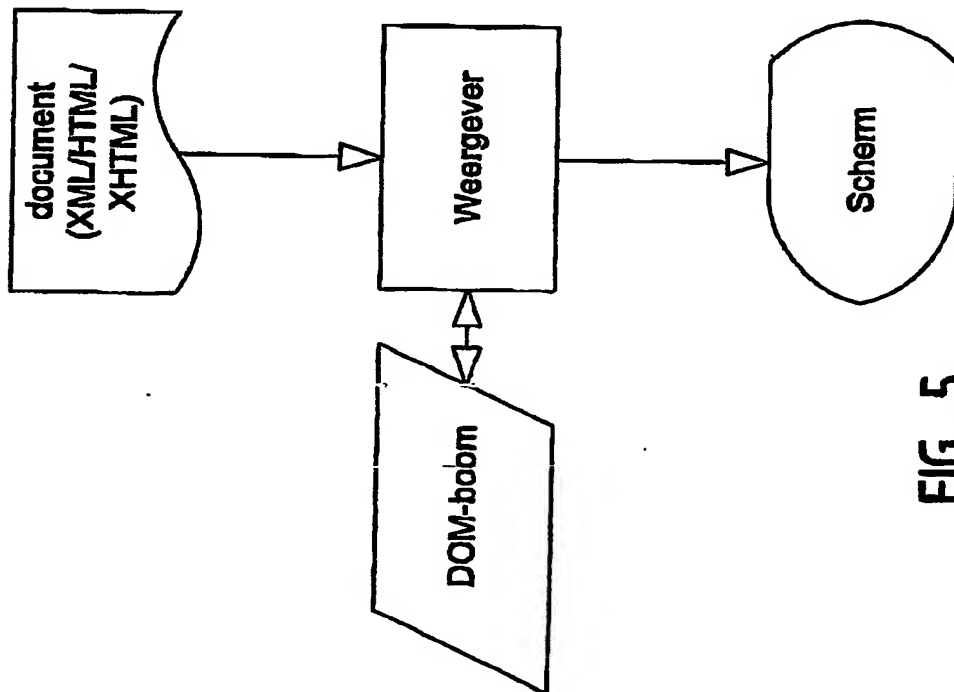


FIG. 5

10 25 12 5

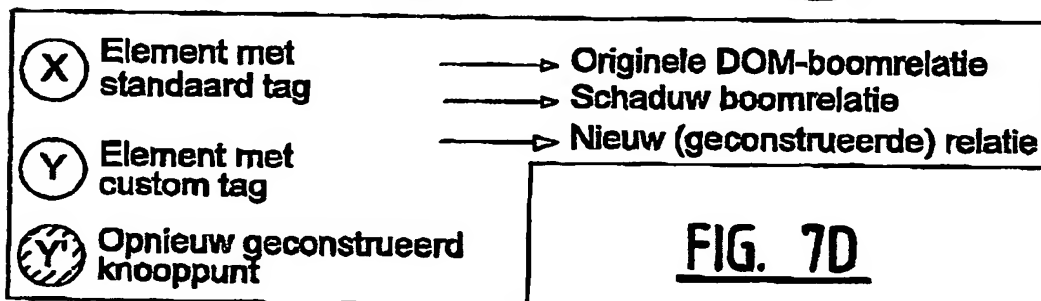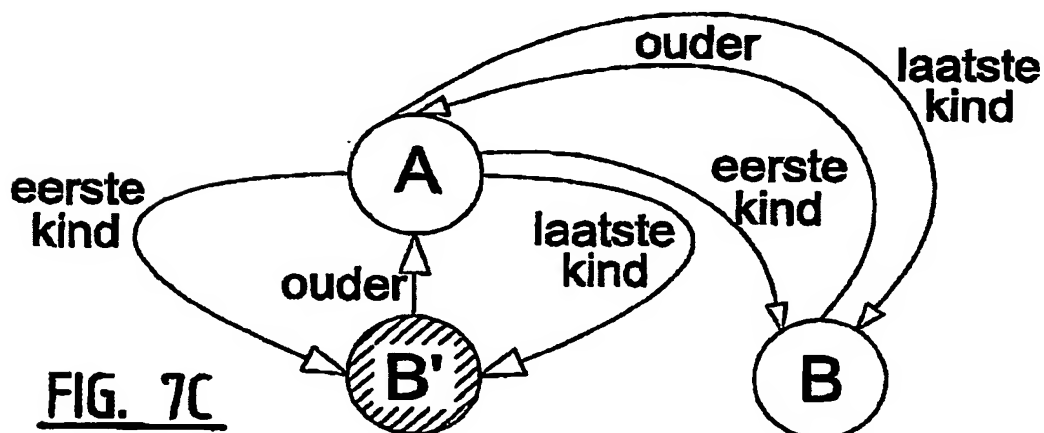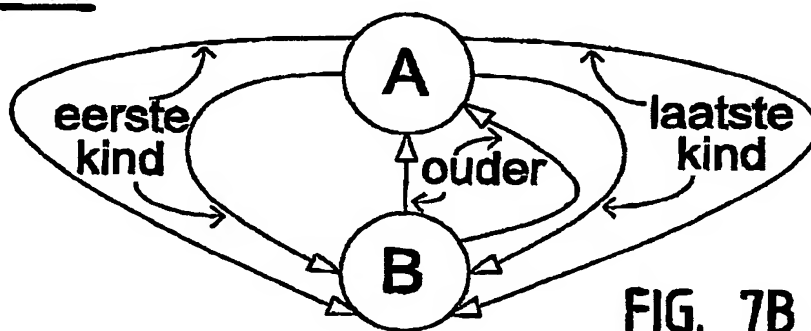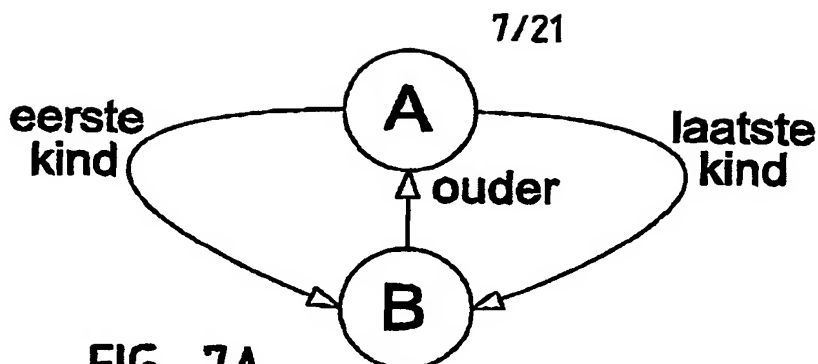

1025125

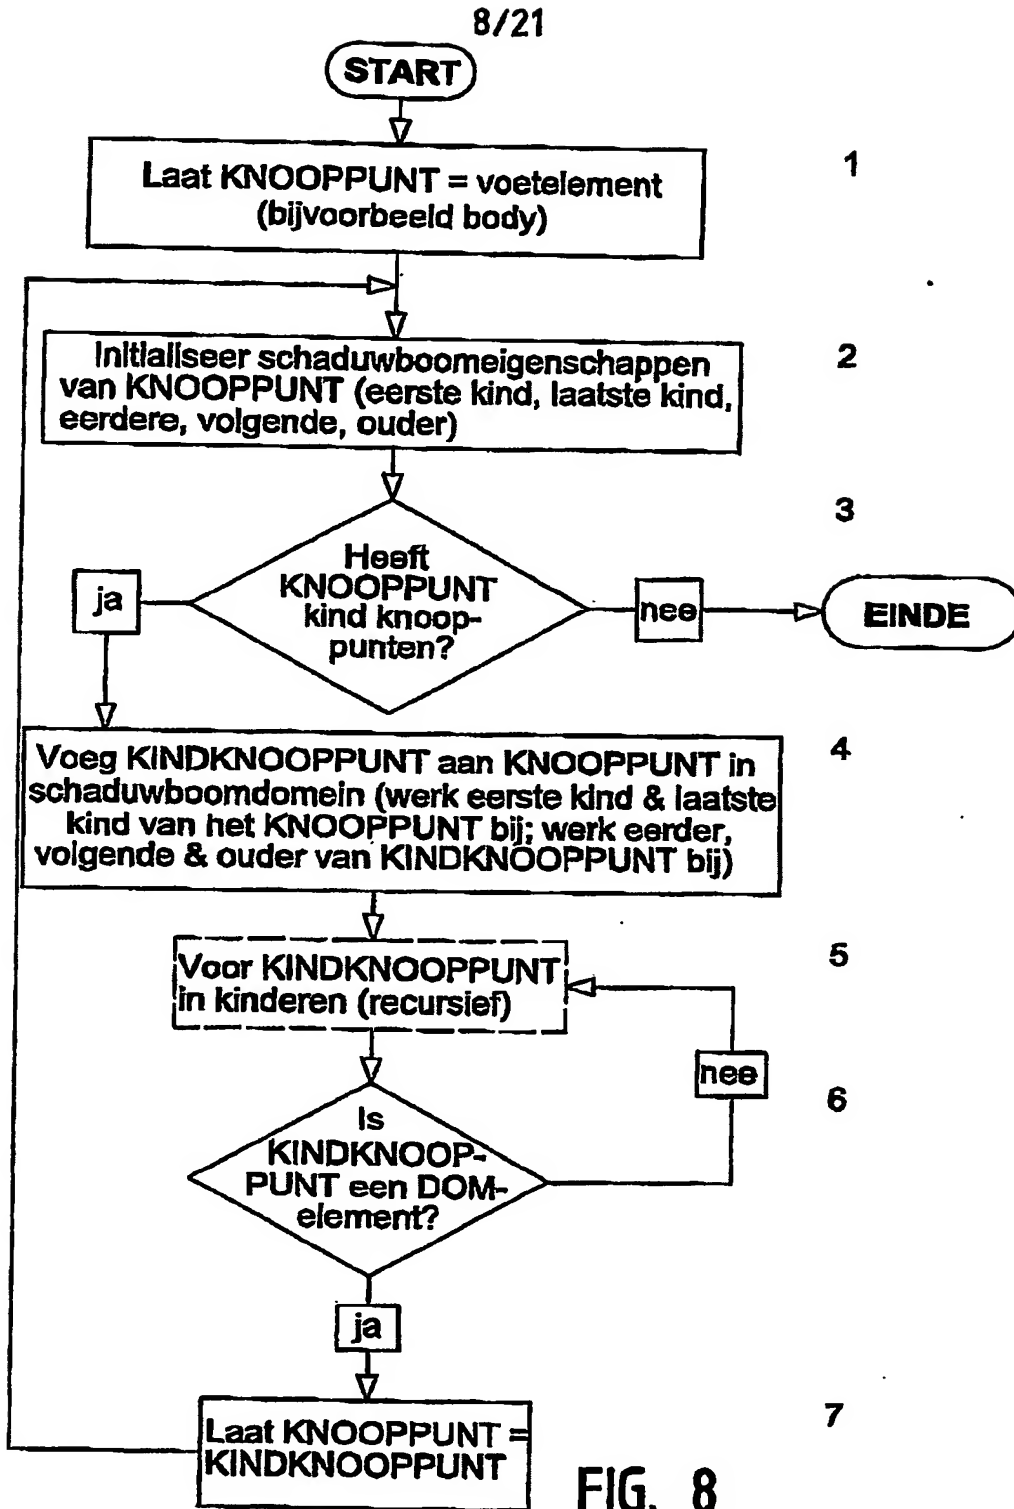


FIG. 8

10 25 12 5

9/21

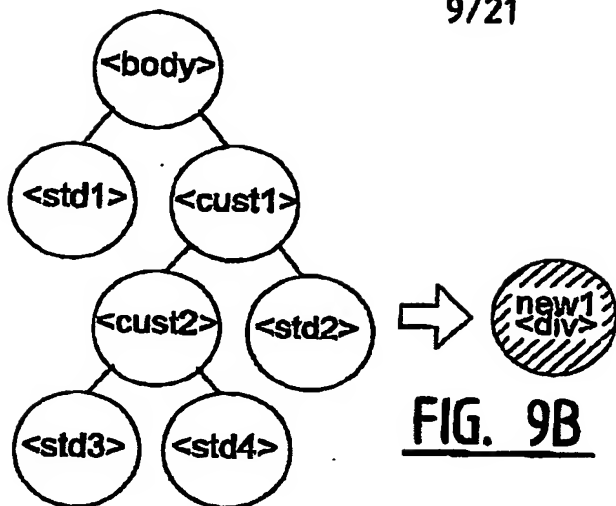


FIG. 9A

FIG. 9B




FIG. 9C

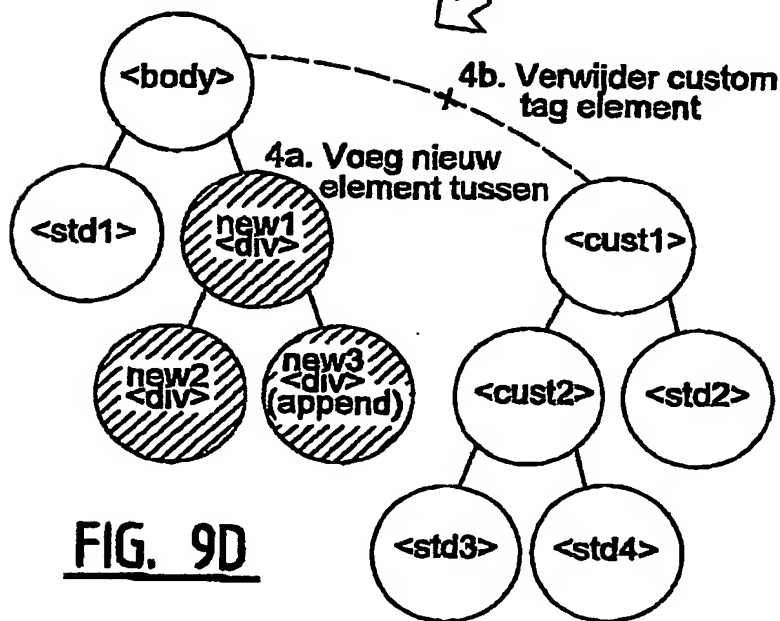


FIG. 9D

10 25 12 5

10/21

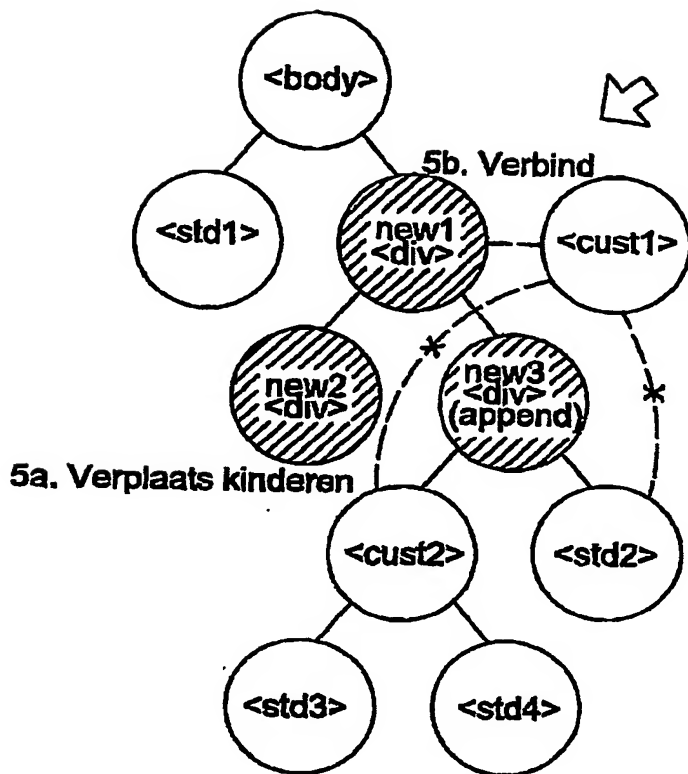


FIG. 9E


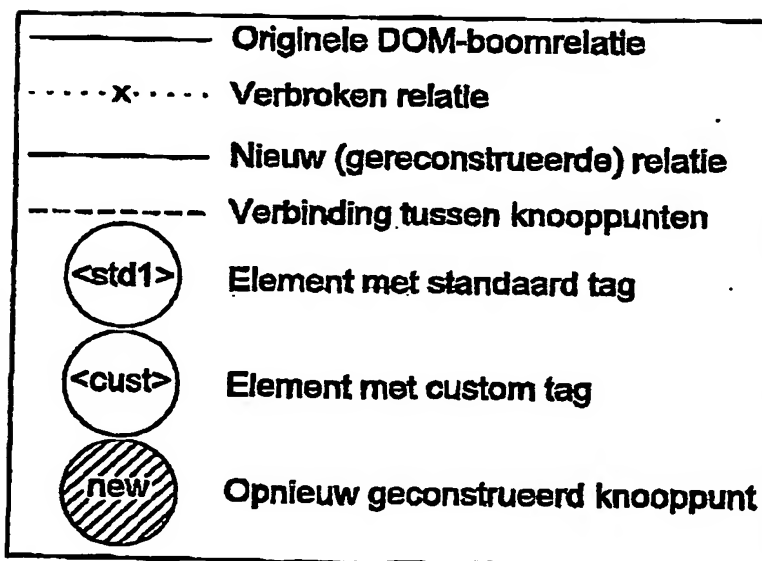


FIG. 9F

1025123

11/21

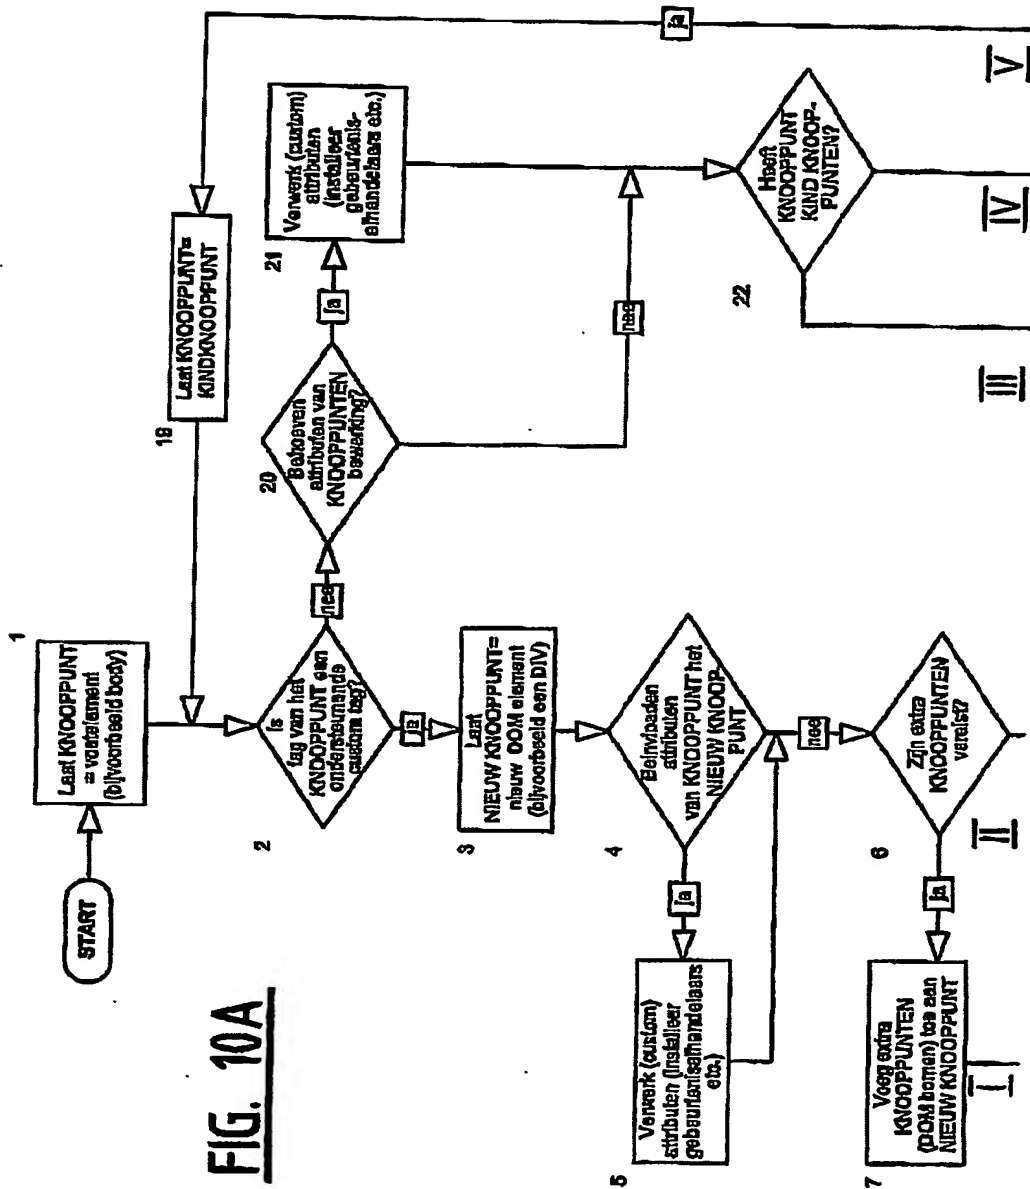

10 2512 5

12/21

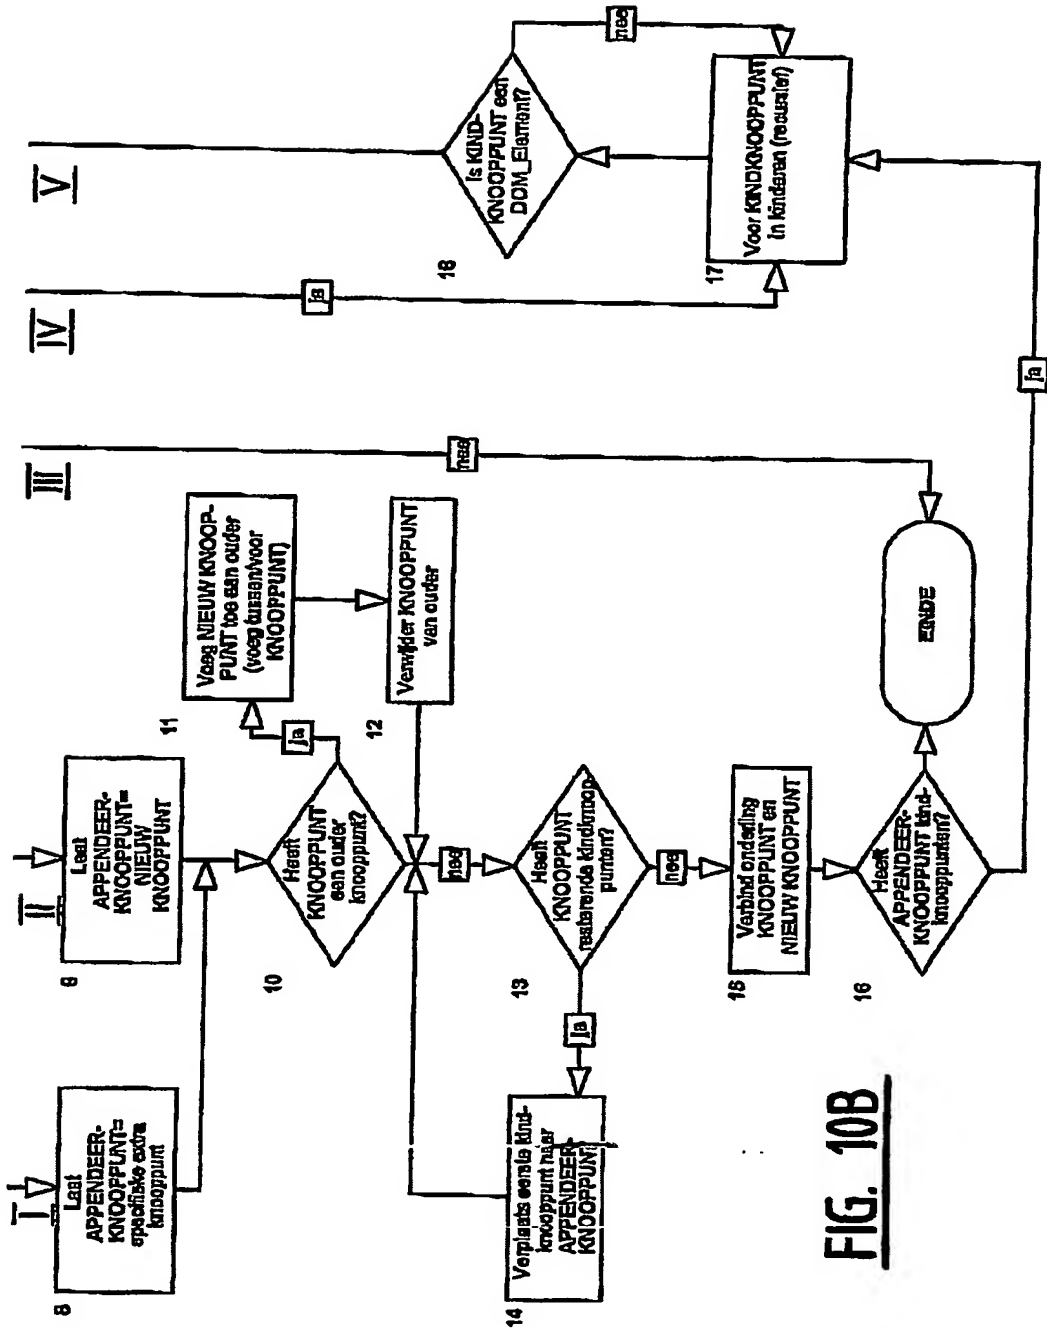


FIG. 10B

10 2512 5

13/21

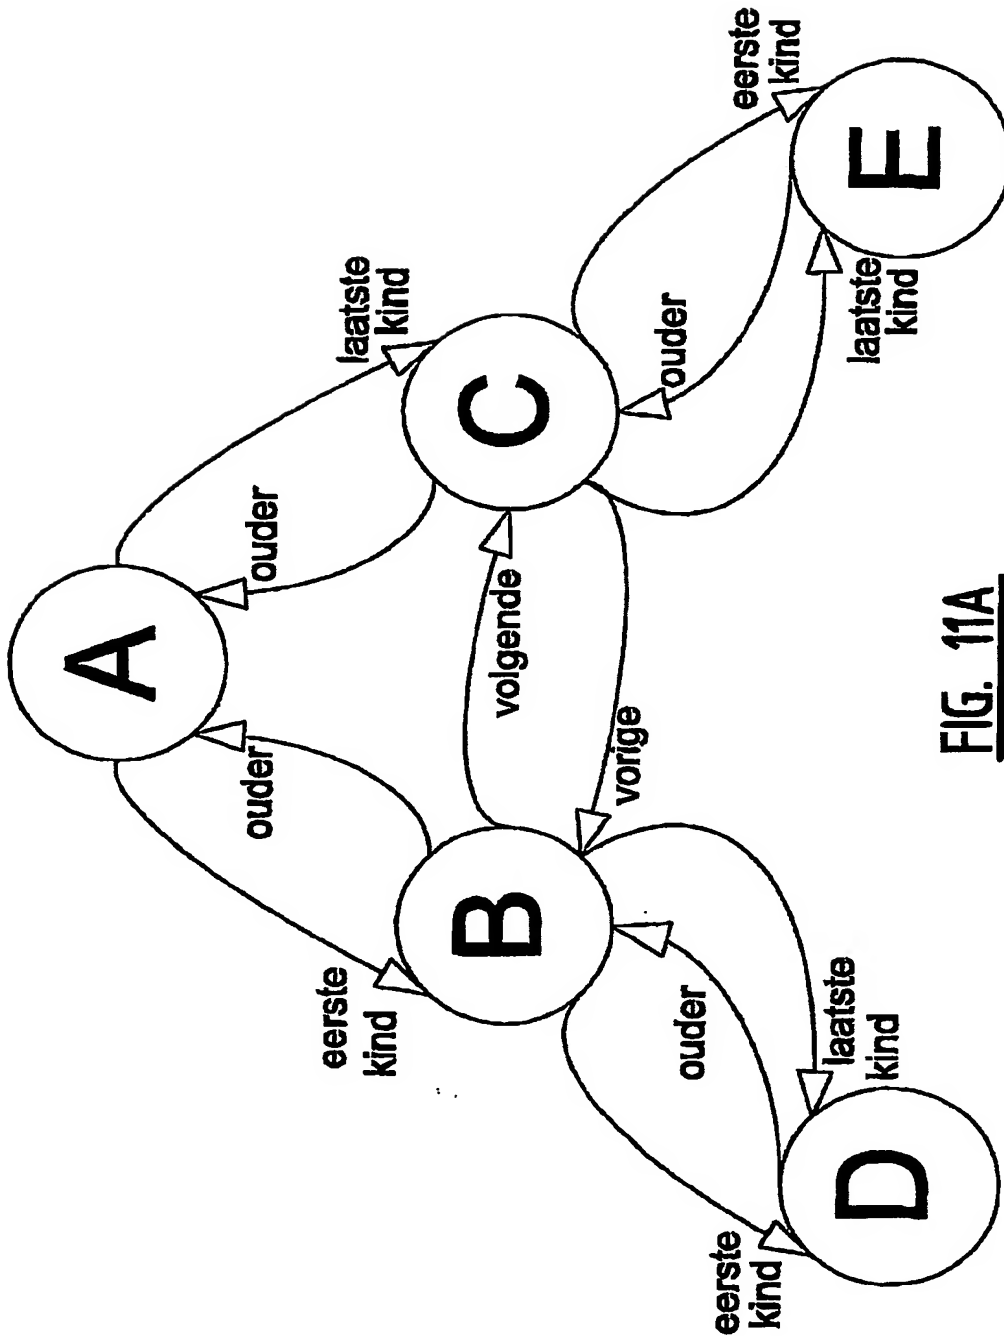
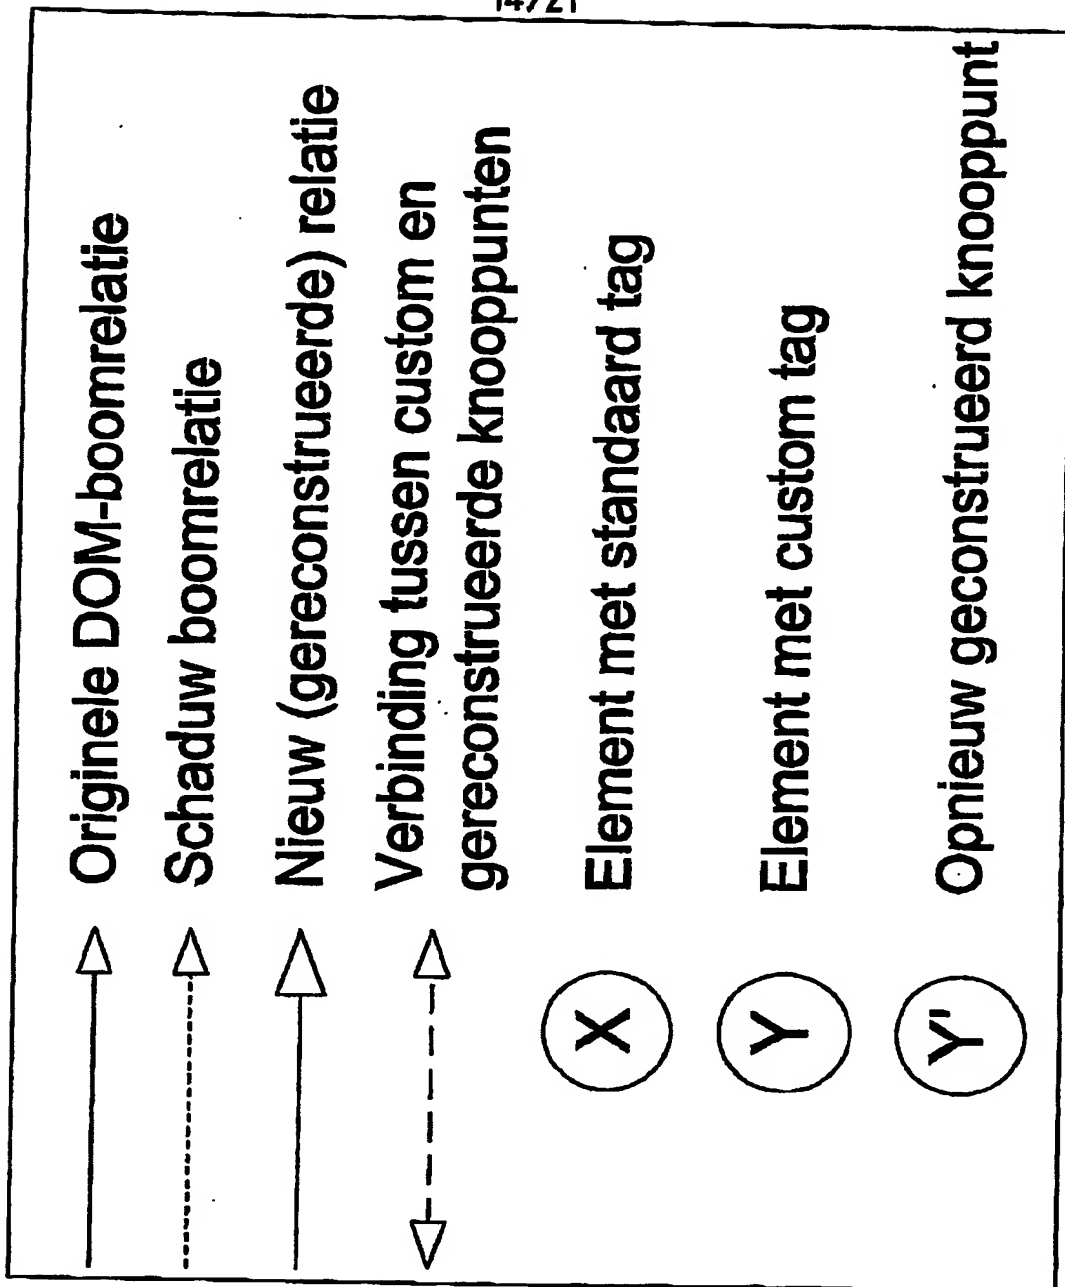


FIG. 11A

10 2512 5

14/21

FIG. 11B

1025125

15/21

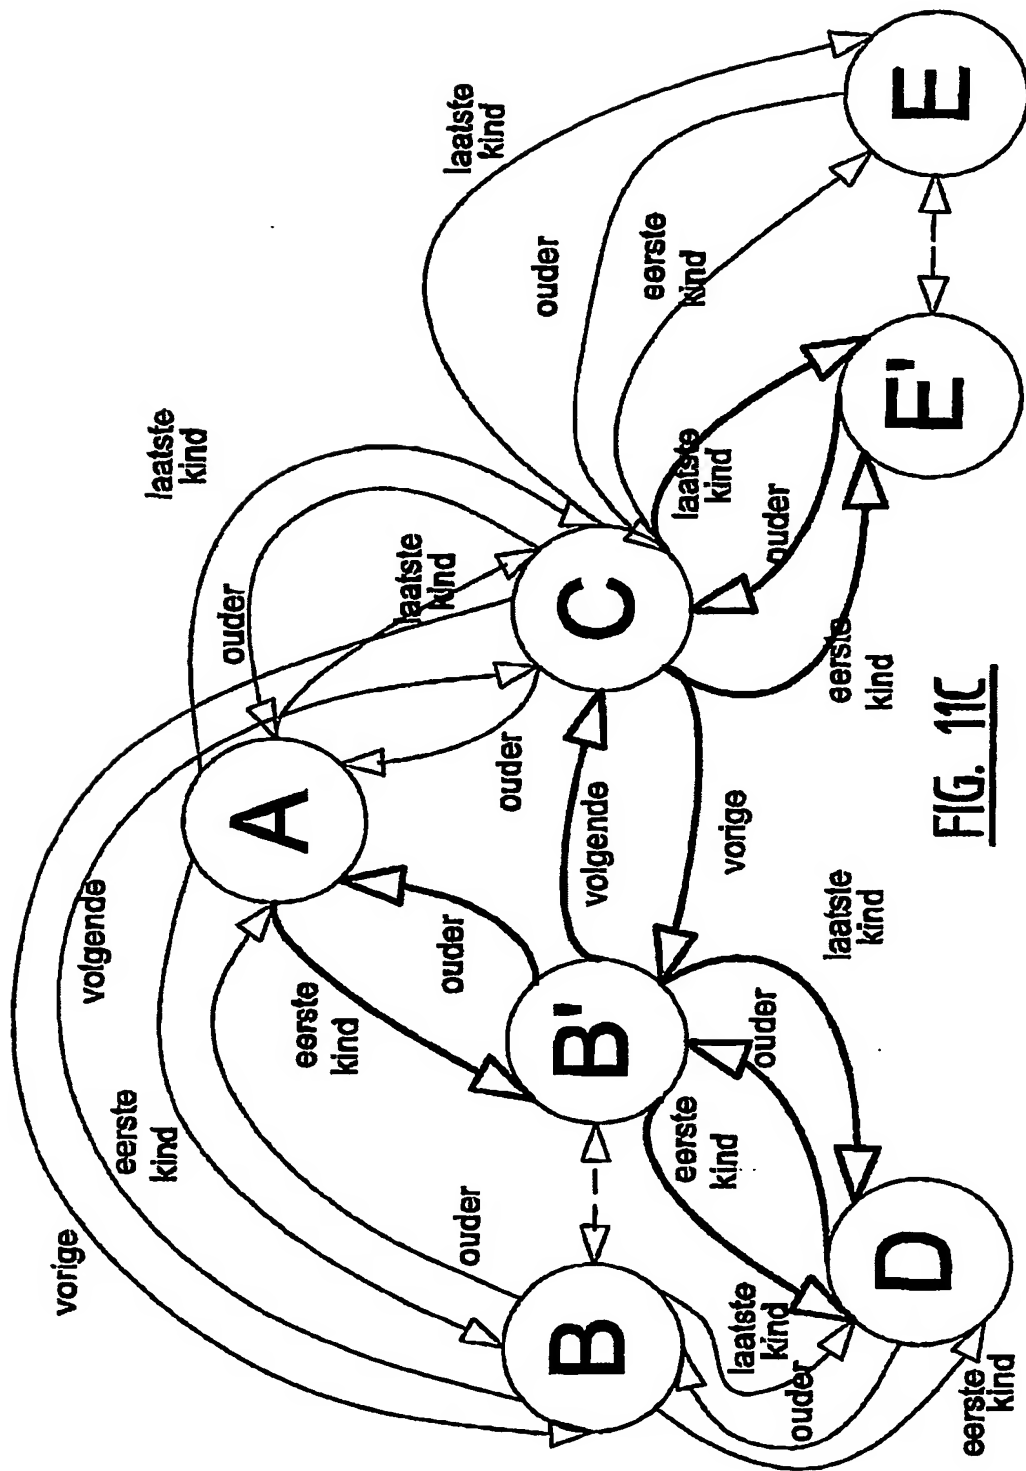
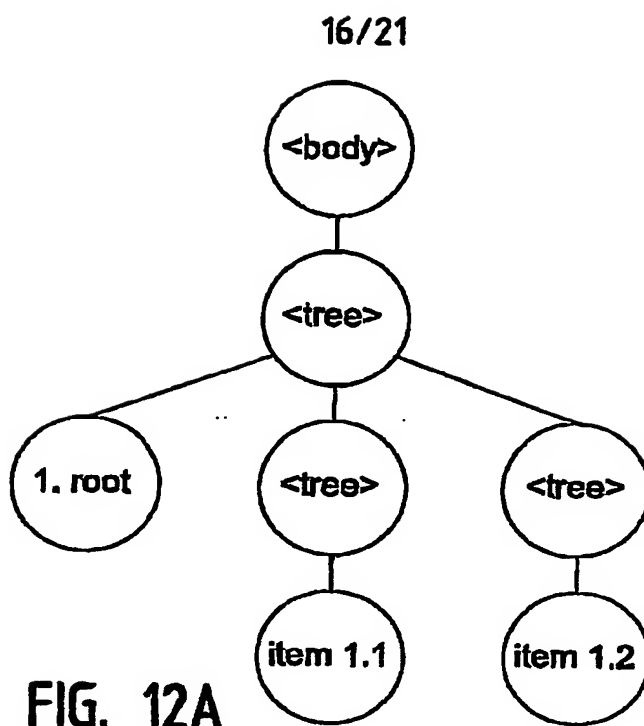
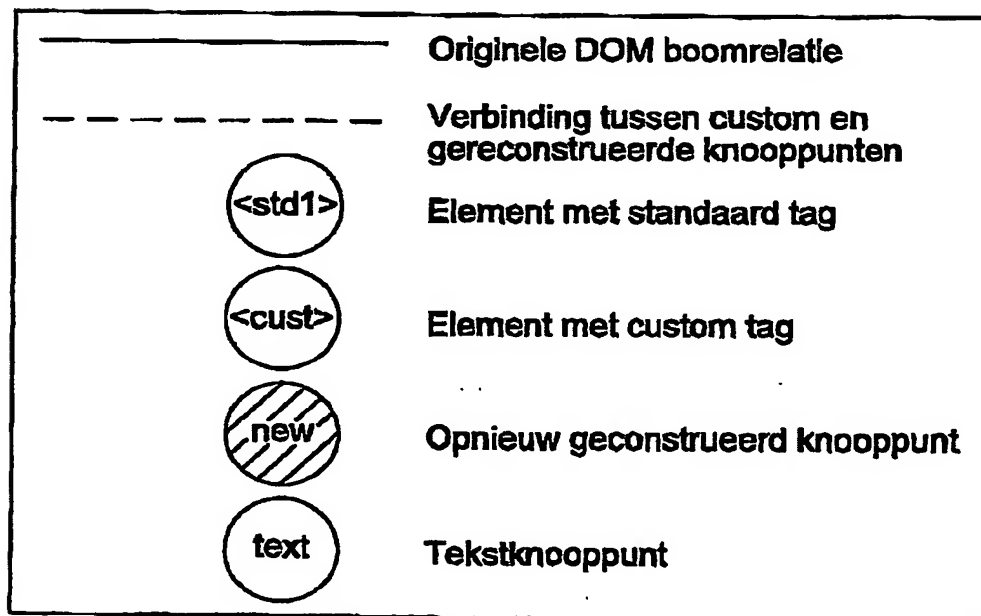



FIG. 11C

10 2512 5

FIG. 12AFIG. 12B

10 25 12 5

17/21

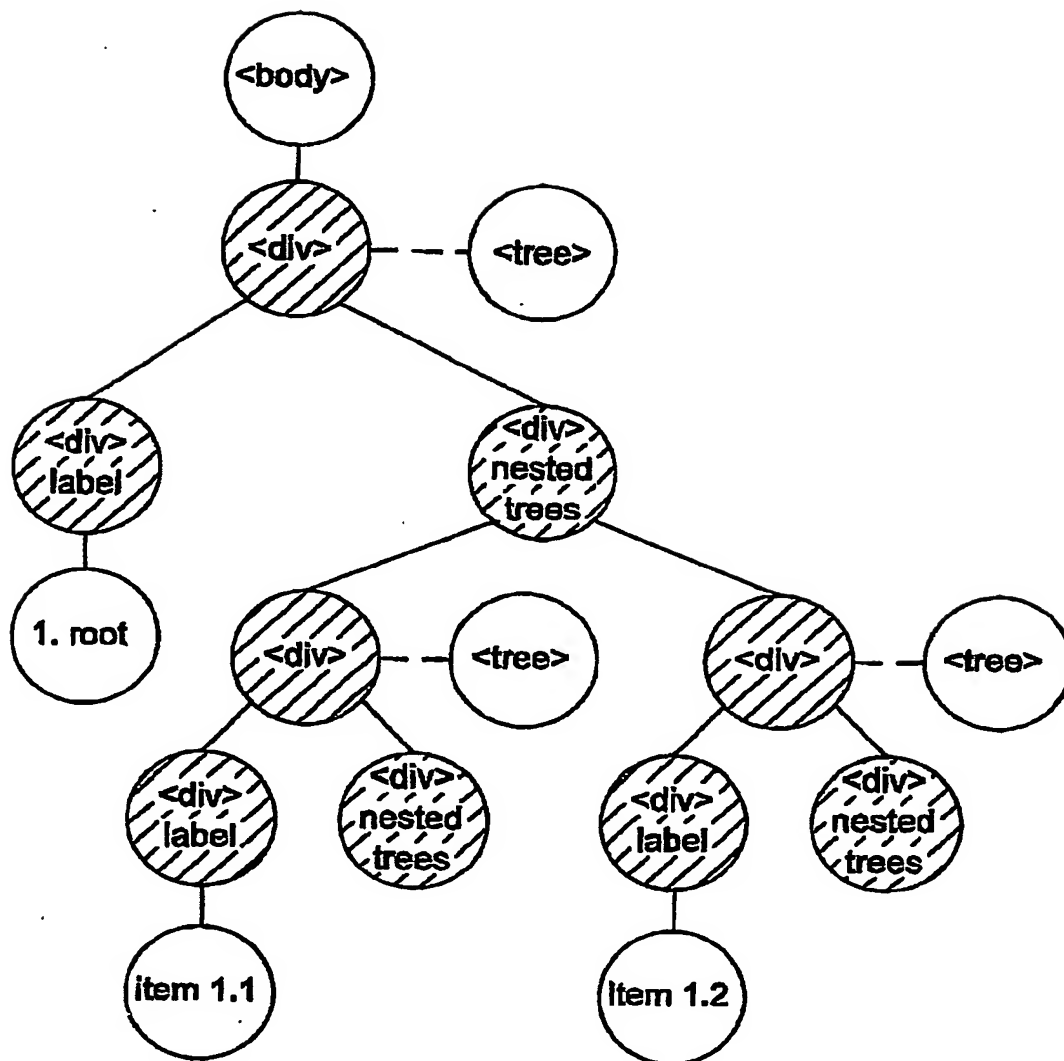FIG. 12C

10 2512 5

18/21

1. boom voet	
--------------	--

FIG. 13A

1. boom voet	
item 1.1	
item 1.2	
item 2	

FIG. 13B

1. boom voet	
--------------	--




FIG. 13C

1. boom voet	
item 1.1	
item 1.2	
item 2	

FIG. 13D

10 25 25

19/21

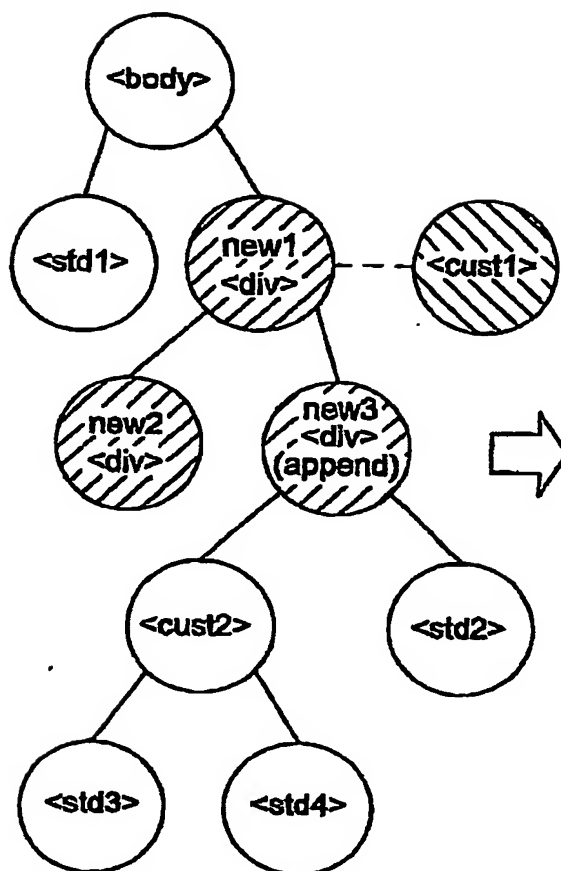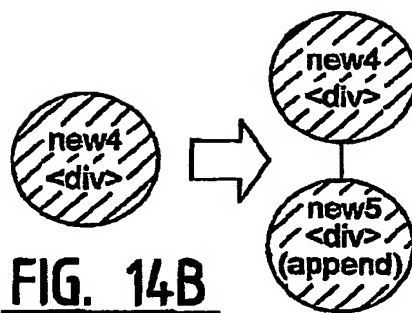FIG. 14AFIG. 14BFIG. 14C

10 25 12 5

20/21

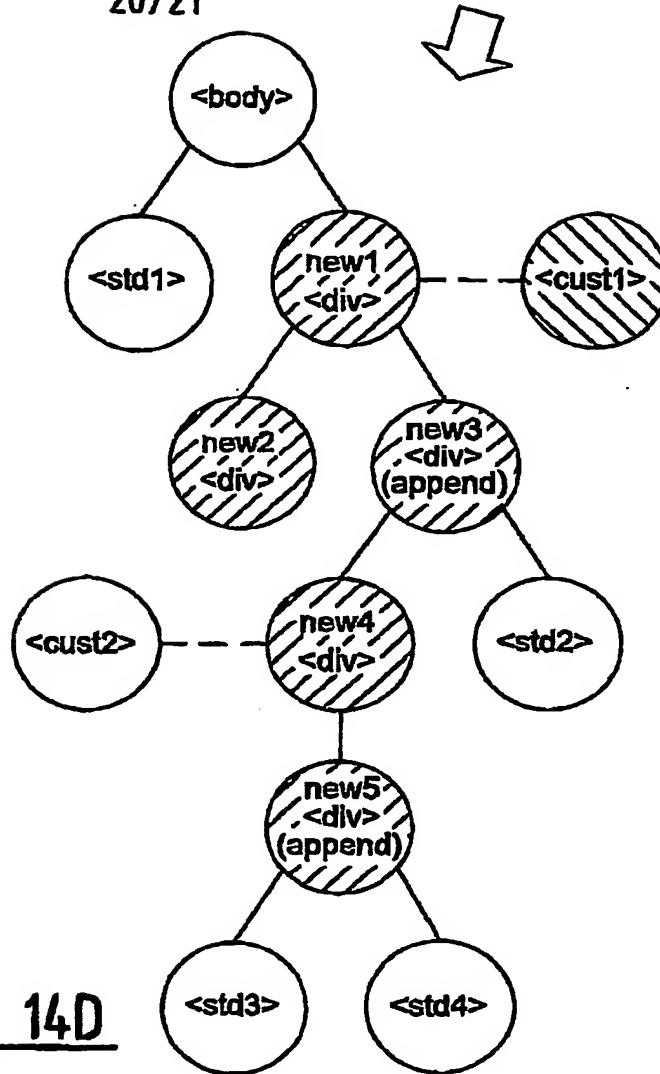


FIG. 14D

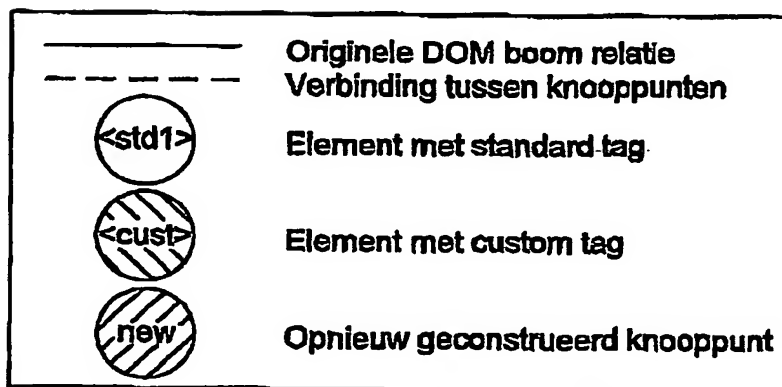
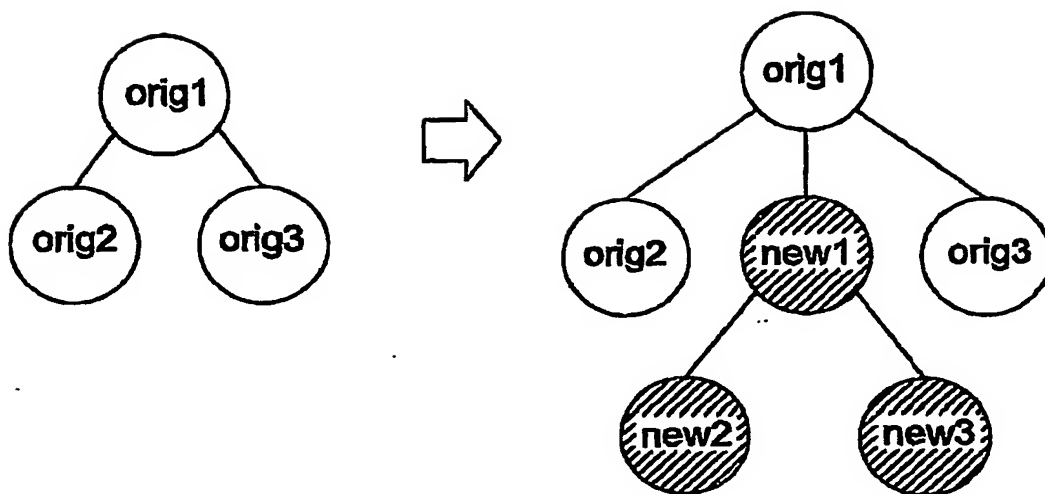
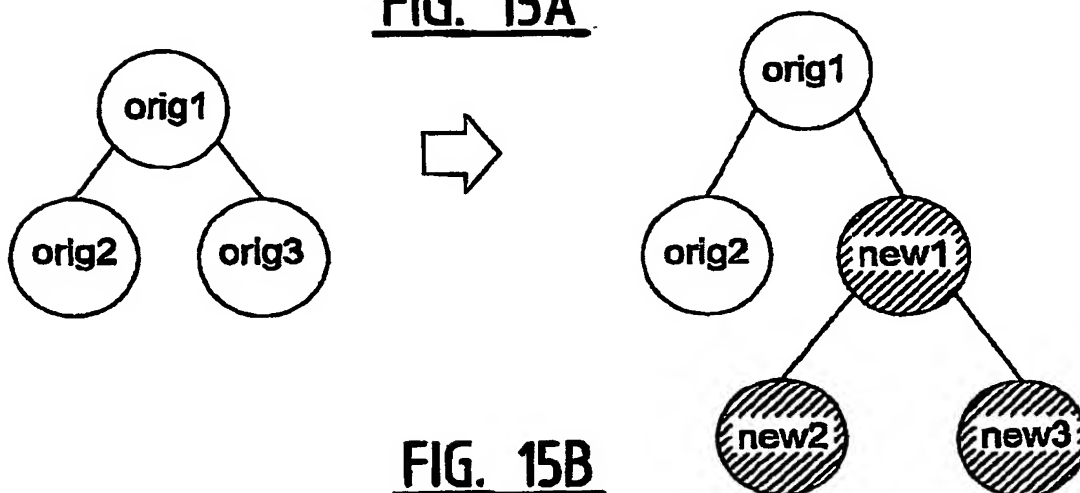
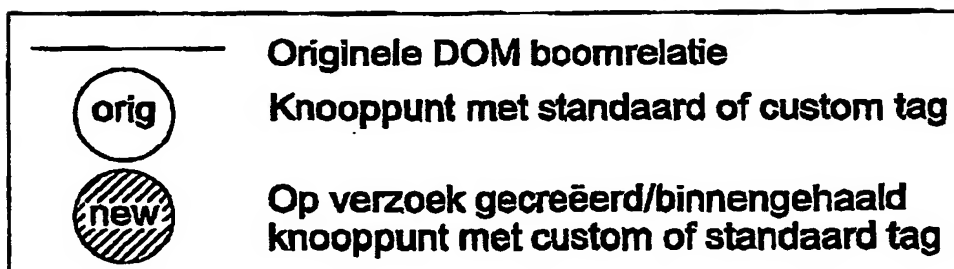


FIG. 14E

10 25 12 5

21/21

FIG. 15AFIG. 15BFIG. 15C

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☒ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☒ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.